





**ROHS**

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

Specifications/技术规格:

Current rating: 1A  
 额定电流: 1A  
 Voltage rating: 125V AC,DC  
 额定电压: 125V AC,DC  
 Insulation Resistance: 500MQ Min.  
 绝缘电阻: 最小500MQ  
 Dielectric Withstanding: 500V AC 1Min  
 耐电压: 500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到85°C

Materials/材料:  
 Contact Material: Phos.bronze (Tin plating)  
 接触端子材料: 磷铜(镀锡)  
 Soldering Material: Phos.bronze (Tin plating)  
 焊脚材料: 磷铜(镀锡)  
 Insulation Material: LCP or PA UL94V-0 Natural  
 绝缘体塑胶材质: LCP 或 PA UL94V-0 本色

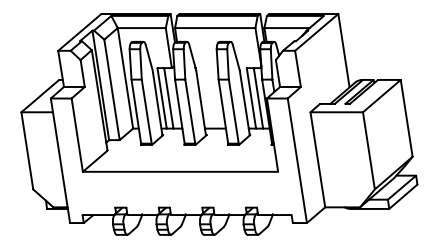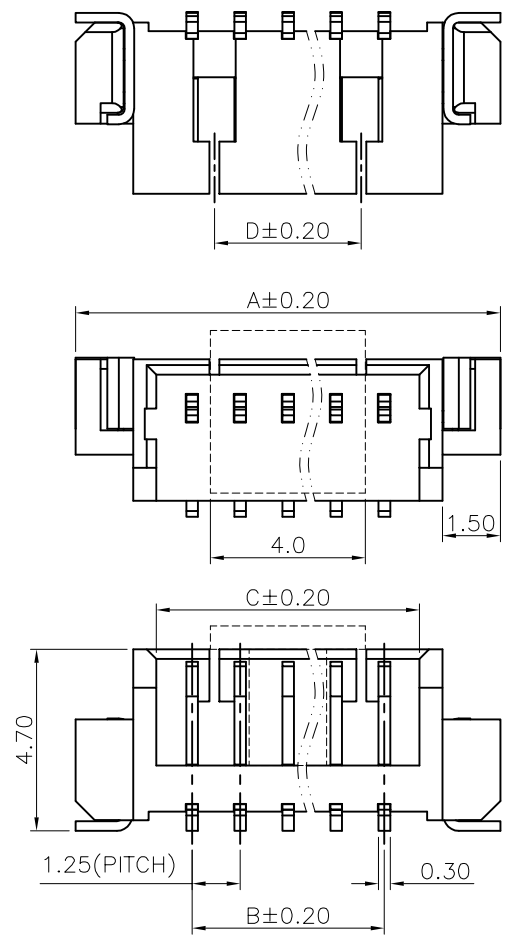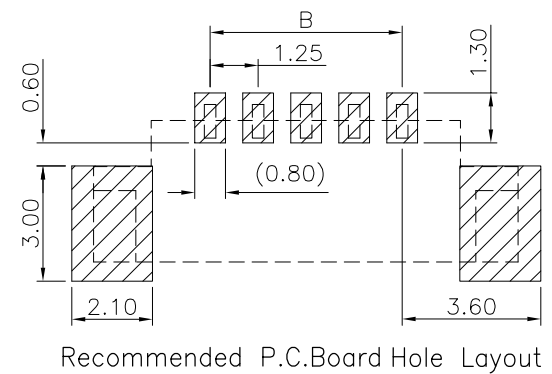

CKT.	A	B	C	D
2	7.30	1.25	3.15	/
3	8.55	2.50	4.40	/
4	9.80	3.75	5.65	2.57
5	11.05	5.00	6.90	3.82
6	12.30	6.25	8.15	5.07
7	13.55	7.50	9.40	6.32
8	14.80	8.75	10.65	7.57
9	16.05	10.00	11.90	8.82
10	17.30	11.25	13.15	10.07
11	18.55	12.50	14.40	11.32
12	19.80	13.75	15.65	12.57
13	21.05	15.00	16.90	13.82
14	22.30	16.25	18.15	15.07
15	23.55	17.50	19.40	16.32
16	24.80	18.75	20.65	17.57
17	26.05	20.00	21.90	18.82
18	27.30	21.25	23.15	20.07
19	28.55	22.50	24.40	21.32
20	29.80	23.75	25.65	22.57

**浙江快利电子有限公司**  
 Zhejiang Kuaili Electronic Co., Ltd

REV. A UNIT. MM SCALE. 1:1

GENERAL TOLERANCE	
X.* ± 3'	.XXX: --
.X* ± 2'	.XX : ±0.20
.XX* ± 1'	.X : ±0.30
.XXX* ± 0.5'	X. : --

DESIGN:	KEVIN	DATE:	15'.3.10
CHECKED:	朱前程	DATE:	15'.3.10
AUDITED:	张宁	DATE:	15'.3.10
APPROVED:	朱建华	DATE:	15'.3.10

DWG. NO.	PART NO. KL-1.25-NALT
TITLE.	

**1.25-NALT**