

1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2023.02.17

CKT	A	B	C
2	1.25	4.35	3.00
3	2.50	5.60	4.25
4	3.75	6.85	5.50
5	5.00	8.10	6.75
6	6.25	9.35	8.00
7	7.50	10.60	9.25
8	8.75	11.85	10.50
9	10.00	13.10	11.75
10	11.25	14.35	13.00
11	12.50	15.60	14.25
12	13.75	16.85	15.50
13	15.00	18.10	16.75
14	16.25	19.35	18.00
15	17.50	20.60	19.25
16	18.75	21.85	20.50

Specifications / 技术规格:

Current Rating: 1A AC,DC

额定电流: 1A AC,DC

Voltage rating: 125V AC,DC

额定电压: 125V AC,DC

Insulation Resistance: 500MΩ Min.

绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC

耐电压: 500V AC






Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94 V-0

绝缘体塑胶材料: PA or PBT UL94 V-0

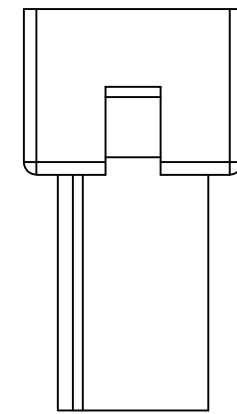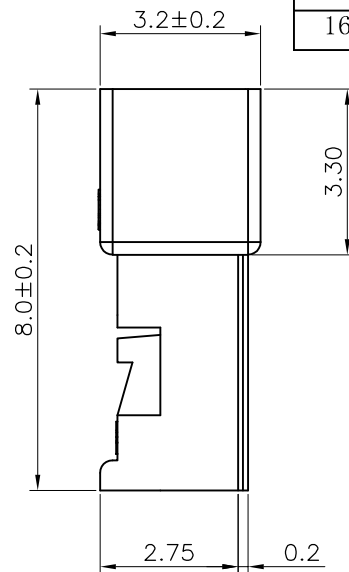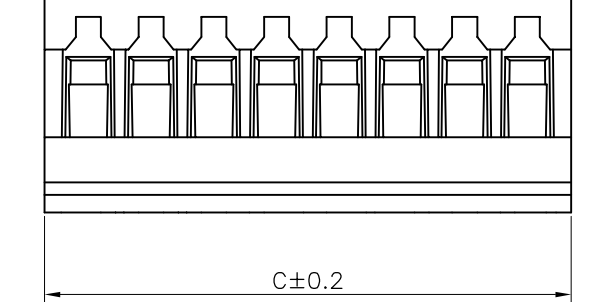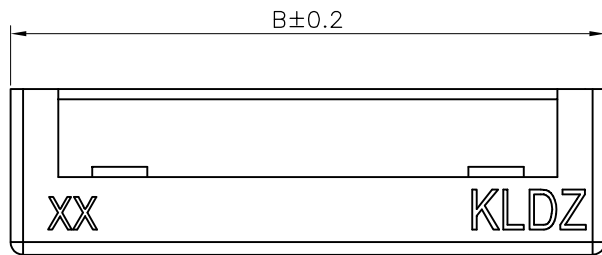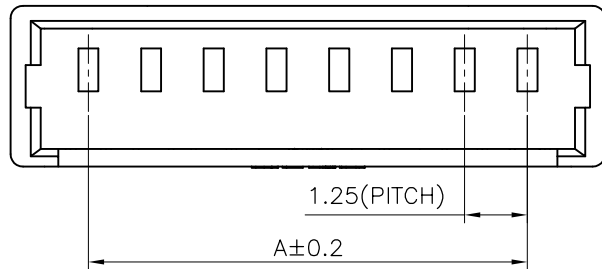

1.25-2AS、1.25-3AS

浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3'	X.: --
.X: ± 2'	X.X: ±0.20
.XX: ± 1'	X.XX: ±0.20
.XXX: ± 0.5'	X.XXX: --

DESIGN:	瞿益远	DATE:	2023-02-17
CHECKED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	KL-1.25-NAS-02-BE

TITLE.	1.25-NAS
--------	----------

REV.	A	UNIT.	mm	SCALE.	-	PROJ.	
------	---	-------	----	--------	---	-------	--

1 2 3 4 5 6 7 8 9