

1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

F



E

D

C



B

A

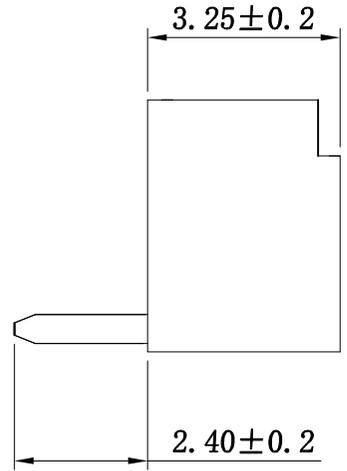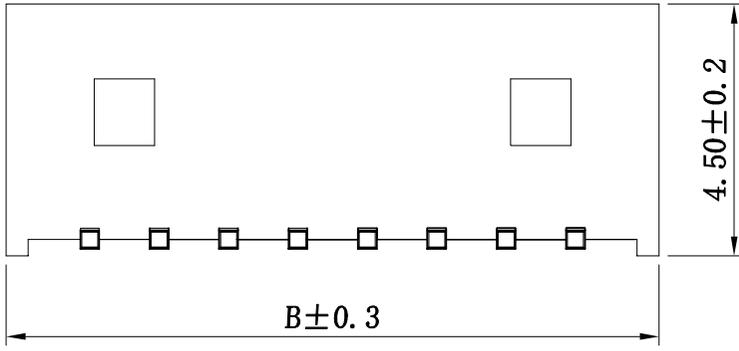

Specifications / 技术规格:

Current rating: 1A
 额定电流: 1A
 Voltage rating: 125V AC, DC
 额定电压: 125V AC, DC
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C
 Materials / 材料:
 Contact Material: Brass (Tin plating)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: PA or PBT UL94V-0 Natural
 绝缘体塑胶材质: PA 或 PBT UL94V-0 本色

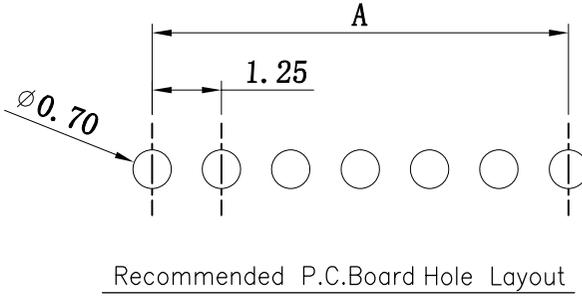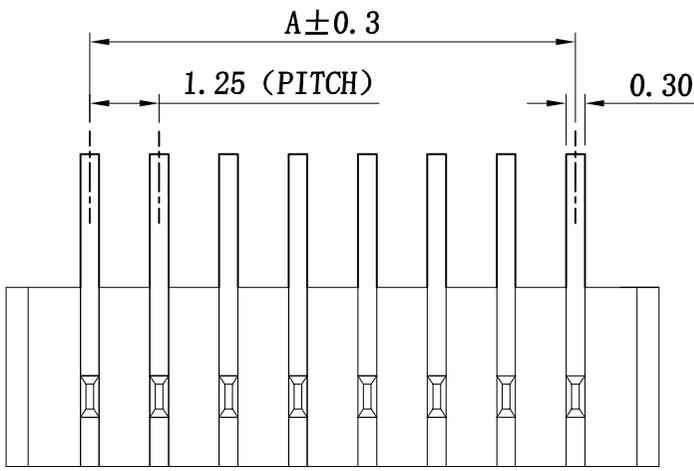


P数	A	B
2	1.25	4.30
3	2.50	5.55
4	3.75	6.80
5	5.00	8.05
6	6.25	9.30
7	7.50	10.55
8	8.75	11.80
9	10.00	13.05
10	11.25	14.30
11	12.50	15.55
12	13.75	16.80
13	15.00	18.05
14	16.25	19.30
15	17.50	20.55

 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	6以下: ±0.10
.X' ± 2'	10以下: ±0.15
.XX' ± 1'	20以下: ±0.25
.XXX' ± 0.5'	50以下: ±0.35

DESIGN: KEVIN	DATE: 2015-3-10
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO. KL-1.25-NAW-02-BE
TITLE.	
1.25-NAW	

REV. A	UNIT. MM	SCALE. 1:1	
--------	----------	------------	---

1 2 3 4 5 6 7 8 9