
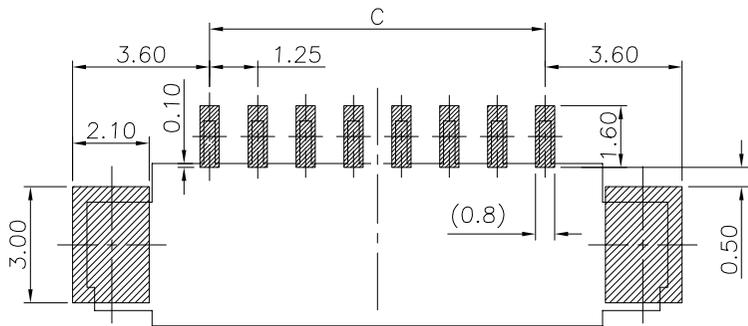

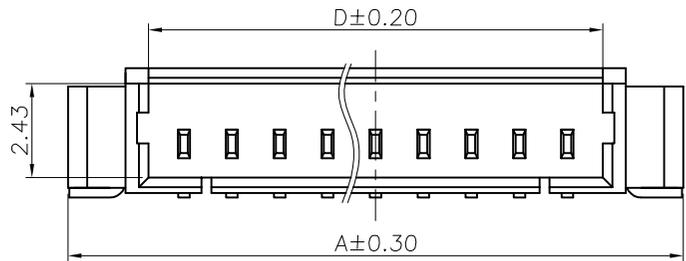
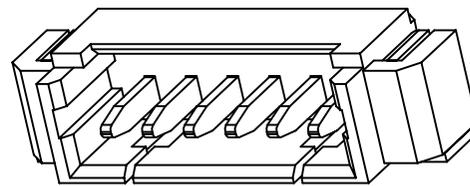


ROHS/HF

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

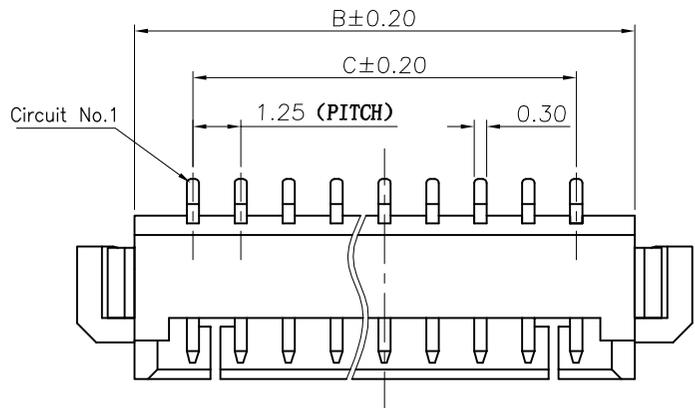

Recommended P.C.Board Hole Layout

Specifications/技术规格:

Current rating: 1A
 额定电流: 1A
 Voltage rating: 125V AC,DC
 额定电压: 125V AC,DC
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials /材料:

Contact Material: Phos.bronze (Tin plating)
 接触端子材料: 磷铜(镀锡)
 Soldering Material: Phos.bronze (Tin plating)
 焊脚材料: 磷铜(镀锡)
 Insulation Material: LCP or PA UL94V-0
 绝缘体塑胶材质: LCP 或 PA UL94 V-0

CKT.	A	B	C	D
2	7.30	4.30	1.25	3.15
3	8.55	5.55	2.50	4.40
4	9.80	6.80	3.75	5.65
5	11.05	8.05	5.00	6.90
6	12.30	9.30	6.25	8.15
7	13.55	10.55	7.50	9.40
8	14.80	11.80	8.75	10.65
9	16.05	13.05	10.00	11.90
10	17.30	14.30	11.25	13.15
11	18.55	15.55	12.50	14.40
12	19.80	16.80	13.75	15.65
13	21.05	18.05	15.00	16.90
14	22.30	19.30	16.25	18.15
15	23.55	20.55	17.50	19.40
16	24.80	21.80	18.75	20.65
17	26.05	23.05	20.00	21.90
18	27.30	24.30	21.25	23.15
19	28.55	25.55	22.50	24.40
20	29.80	26.80	23.75	25.65

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. ± 3'	.XXX: ±0.10
.X ± 2'	.XX: ±0.15
.XX ± 1'	.X: ±0.25
.XXX ± 0.5'	X.: ±0.35

DESIGN:	KEVIN	DATE:	15'.3.10
CHECKED:	朱前程	DATE:	15'.3.10
AUDITED:	张宁	DATE:	15'.3.10
APPROVED:	朱建华	DATE:	15'.3.10

DWG. NO.	KL-1.25-NAWT
PART NO.	

TITLE:	1. 25-NAWT
--------	------------

REV.	A	UNIT.	MM	SCALE.	1:1