
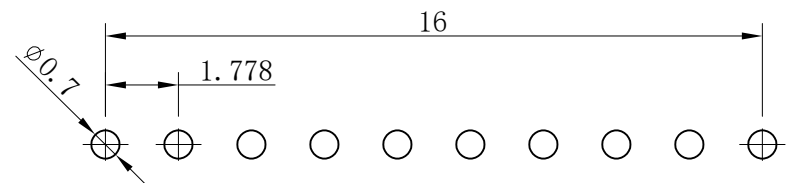




1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

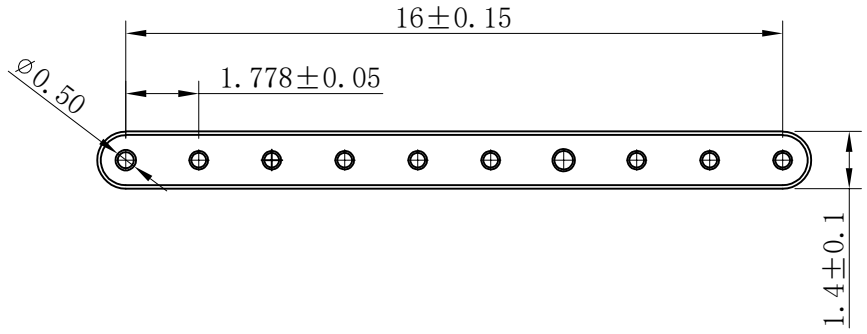

Recommended P.C.Board Hole Layout

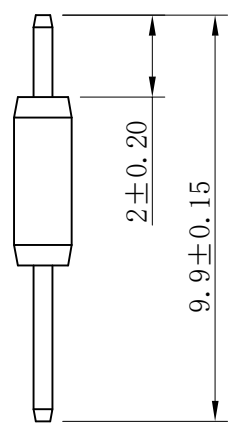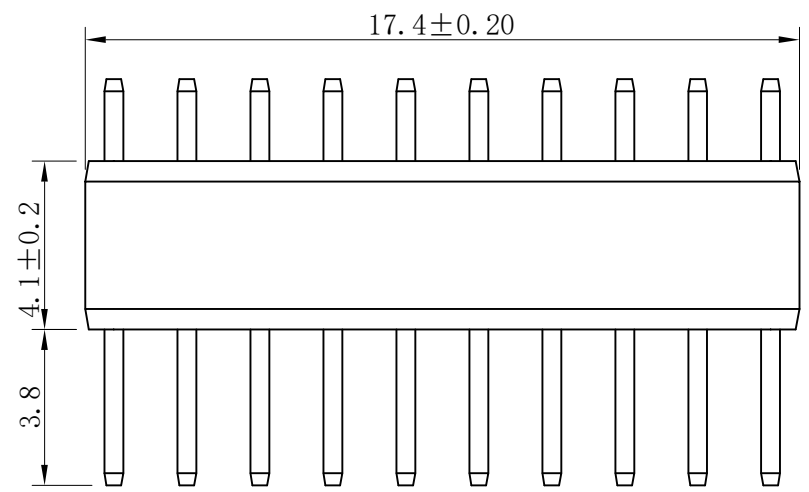

Specifications / 技术规格:

Current rating: 2A
 额定电流: 2A
 Voltage rating: 100V AC,DC
 额定电压: 100V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1000V AC 1Min
 耐电压: 1000V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Phosphor bronze Tin or Gold plated
 接触端子材料: 磷铜 电镀Sn或Au
 Insulation Material:
 LCP UL94 V-0

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	X. ±0.35
.X* ± 2'	.X ±0.25
.XX* ± 1'	.XX ±0.15
.XXX* ± 0.5'	.XXX ±0.10

DESIGN:	KEVIN	DATE:	2015.9.17
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	1.778-10A

TITLE.	1.778连接器
--------	----------

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9