

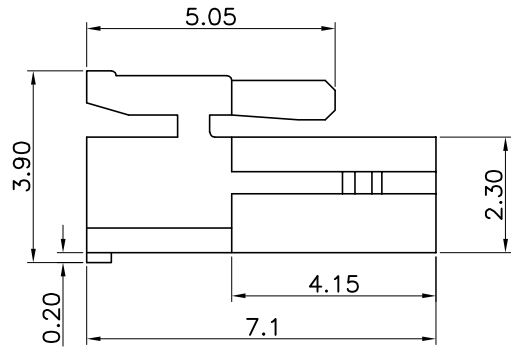

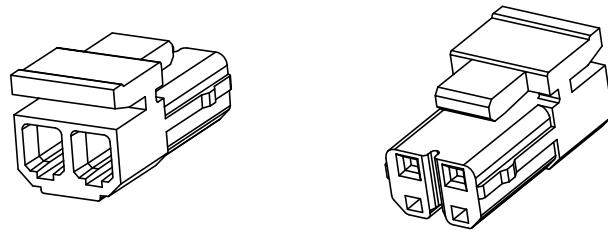


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.7.2
B	2017041701	修改②处尺寸	HELLER	2017.4.17

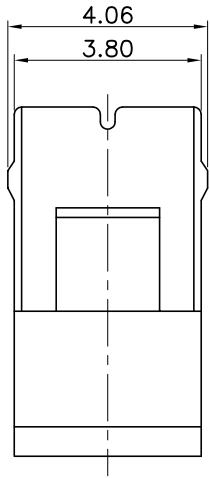

SPECIFICATIONS:
 1.Operation temperature : -25~+85°C;
 2.Crrent rating: 2A;
 3.Voltag rating: 250V DC/AC;
 4.Contact resistance: 10mΩ max;
 5.Insulation resistance: 1000MΩ min;
 6.Dielectric voltage: 800V AC /1minute;
 7.Environmental requirement:according to ROHS standard.
 MATERIAL:
 Insulation Material: PA or PBT UL94V-0

浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ±3°	X.: ±0.35
.X: ±2°	X.X: ±0.25
.XX: ±1°	X.XX: ±0.15
.XXX: ±0.5°	X.XXX: ±0.10

DESIGN: 瞿益远
 CHECKED: 张宁
 APPROVED: 朱建华

DATE: 2017-4-17
 DATE: 2017-4-17
 DATE: 2017-4-17

DWG. NO.
 PART NO. KL-1800-2Y

TITLE.
 1800-2Y

REV.	UNIT.	SCALE.	PROJ.
B	mm	-	