


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2023.05.06

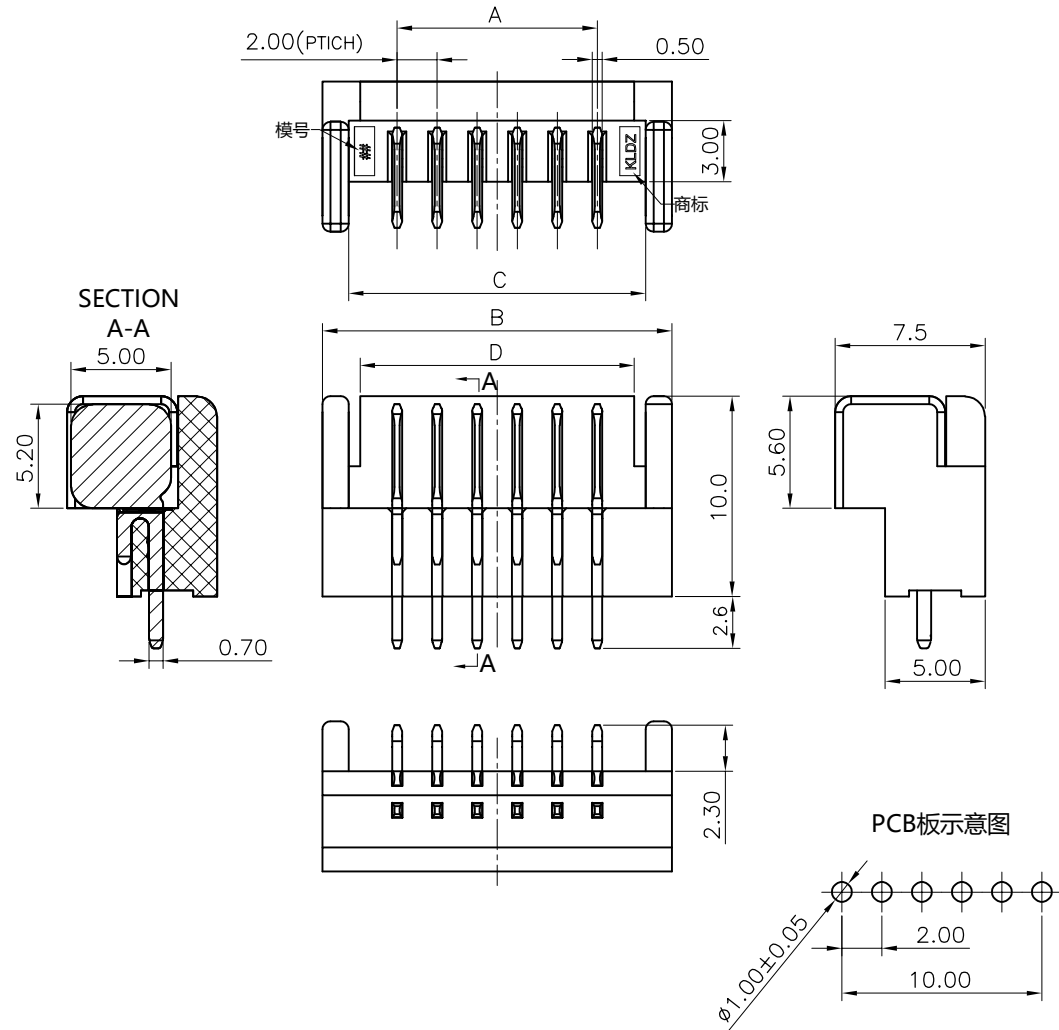

Specifications / 技术规格:

Current Rating: 7A
 额定电流: 7A
 Voltage rating: 30V DC
 额定电压: 30V DC
 Insulation Resistance: 100MΩ Min.
 绝缘电阻: 最小100MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C
 Insulation Material: LCP PA9T V-0 Balck
 材料: LCP/PA9T 阻燃UL94V-0 黑色

CKT	DIM			
	A	B	C	D
2	/	9.5	6.8	5.7
3	4.00	11.5	8.8	7.7
4	6.00	13.5	10.8	9.7
5	8.00	15.5	12.8	11.7
6	10.00	17.5	14.8	13.7
7	12.00	19.5	16.8	15.7
8	14.00	21.5	18.8	17.7
9	16.00	23.5	20.8	19.7
10	18.00	25.5	22.8	21.7
11	20.00	27.5	24.8	23.7
12	22.00	29.5	26.8	25.7
13	24.00	31.5	28.8	27.7
14	26.00	33.5	30.8	29.7
15	28.00	35.5	32.8	31.7

浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3°	X.: ± 0.40
.X: ± 2°	X.X: ± 0.30
.XX: ± 1°	X.XX: ± 0.20
.XXX: ± 0.5°	X.XXX: ± 0.10

DESIGN:	徐民建	DATE:	2023-05-06
CHECKED:	王子林	DATE:	2023-05-06
APPROVED:	朱建华	DATE:	2023-05-06

DWG. NO.	
PART NO.	KL-2.0-NA

TITLE:
 2.0mm-NA电池连接器针座

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	