


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2022.07.29

Specifications / 技术规格:

Current Rating: 3A
 额定电流: 3A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC
 耐电压: 800V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C


Materials / 材料:

Insulation Material: PBT/Nylon UL94 V-0 Black
 绝缘体塑胶材料: PBT/尼龙 UL94 V-0 黑色

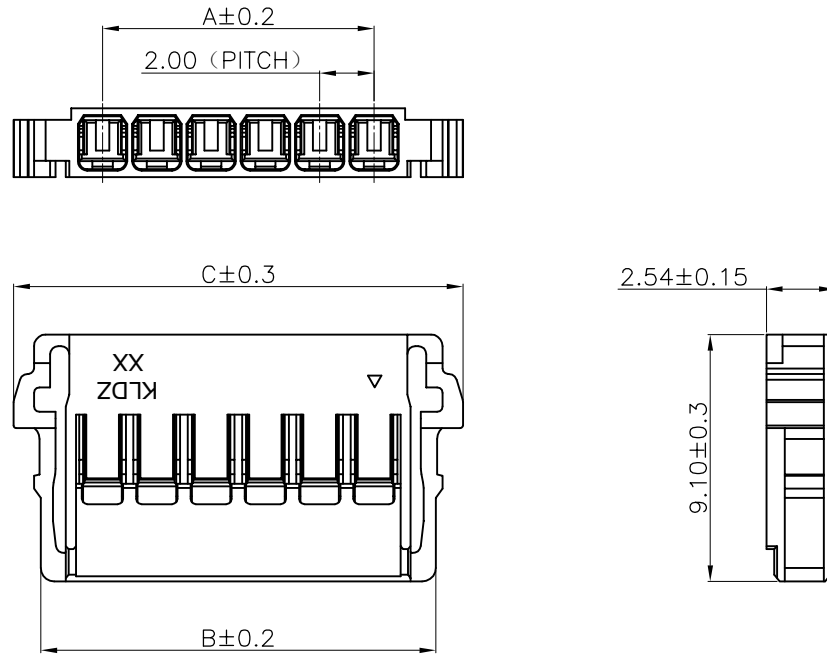

CKT.	A	B	C
2	2.00	6.55	8.55
3	4.00	8.55	10.55
4	6.00	10.55	12.55
5	8.00	12.55	14.55
6	10.00	14.55	16.55

 浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	

GENERAL TOLERANCE	
X.: ± 3'	X.: ±0.35
.X: ± 2'	X.X: ±0.25
.XX: ± 1'	X.XX: ±0.15
.XXX: ± 0.5'	X.XXX: ±0.10

DESIGN: 瞿益远
 CHECKED: 瞿益远
 APPROVED: 瞿益远

DATE: 2022-07-29
 DATE:
 DATE:

DWG. NO.
 PART NO.
 KL-2053-NY

TITLE:
 2053-NY