
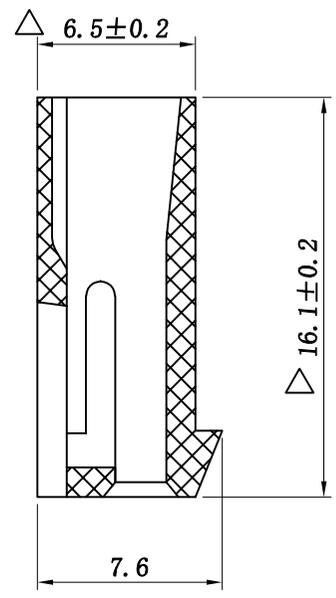



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		new drawing	KEVIN	

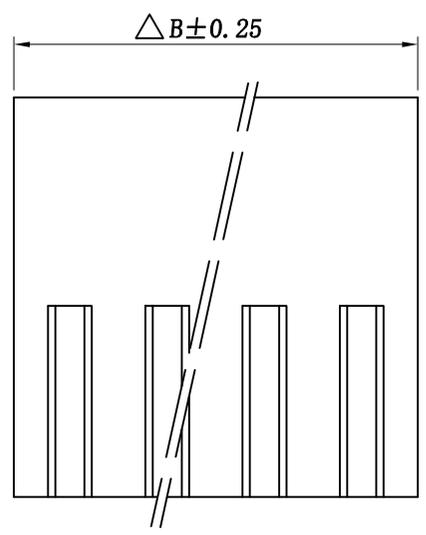

ROHS

Specifications:
 Rated Voltage: 250V AC, DC
 Rated Current: 5A
 Contact Resistance: 20mΩ MAX
 Insulation Resistance: 1000MΩ MIN
 Withstand Voltage: 1500V AC/minute
 Working Temperature: -25℃~85℃

Materials:
 Housing: PA6 UL94V-0(2)

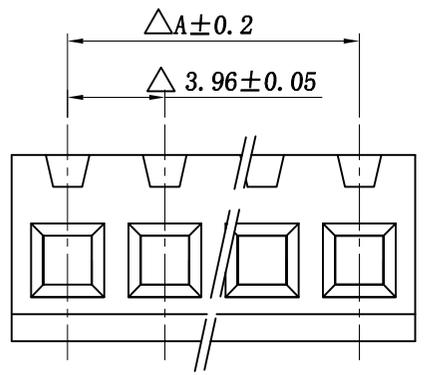

POLES	DIM (mm)	
	A	B
2	3.96	8.7
3	7.92	12.7
4	11.88	16.6
5	15.84	20.6
6	19.80	24.6
7	23.76	28.5
8	27.72	32.5
9	31.68	36.5
10	35.64	40.5

△为重点管制尺寸

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X* ± 3'	6以下: ±0.10
.X* ± 2'	10以下: ±0.15
.XX* ± 1'	20以下: ±0.25
.XXX* ± 0.5'	50以下: ±0.35

DESIGN: KEVIN	DATE: 2015-03-10
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO. KL-3.96-NY
TITLE: 3.96-NY	

REV. A	UNIT. MM	SCALE. 1:1	
--------	----------	------------	--