

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2018.11.17

Specifications / 技术规格:

Current Rating: 2A

额定电流: 2A

Voltage rating: 125V AC,DC

额定电压: 125V AC, DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 500V AC

耐电压: 500V AC


Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural

绝缘体塑胶材料: PA 或 PBT UL94V-2 本色

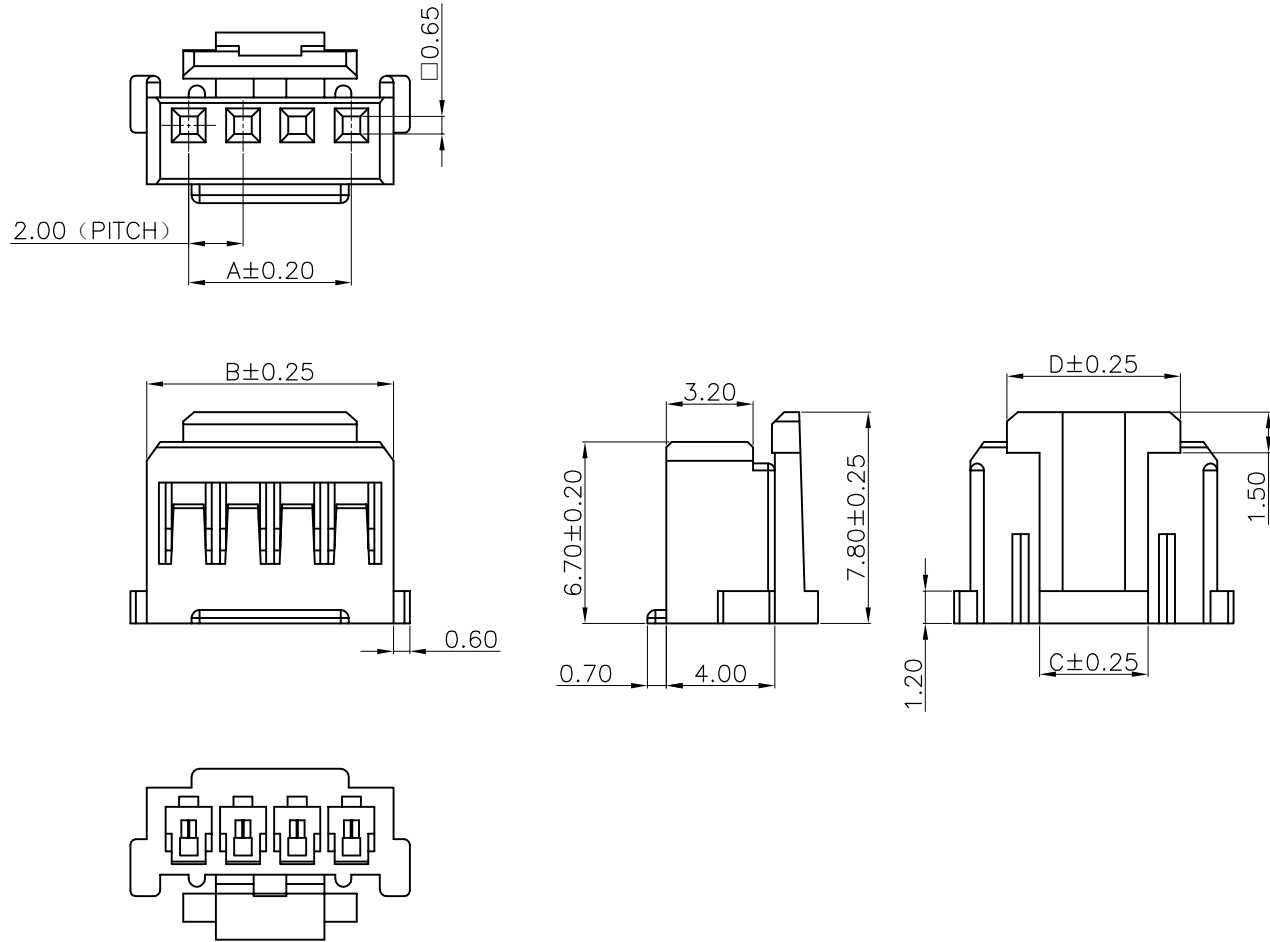

CKT.	A	B	C	D
4	6.0	9.1	4.0	6.4
5	8.0	11.1		
6	10.0	13.1		
7	12.0	15.1	8.0	10.8
8	14.0	17.1		
9	16.0	19.1		
10	18.0	21.1		
11	20.0	23.1		
12	22.0	25.1		
13	24.0	27.1	8.0	10.8
14	26.0	29.1		
15	28.0	31.1		
16	30.0	33.1		

浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

REV. A UNIT. mm SCALE. - PROJ.

GENERAL TOLERANCE	
X.: ± 3'	X.: ± 0.35
.X: ± 2'	X.X: ± 0.25
.XX: ± 1'	X.XX: ± 0.15
.XXX: ± 0.5'	X.XXX: ± 0.10

DESIGN: HELLER
CHECKED:
APPROVED:

DATE: 2018-11-17
DATE:
DATE:

DWG. NO.
PART NO.
KL-3535-NY

TITLE.
2.0间距单排T型扣
3535-NY