
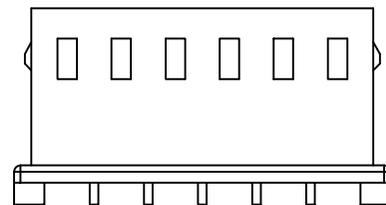


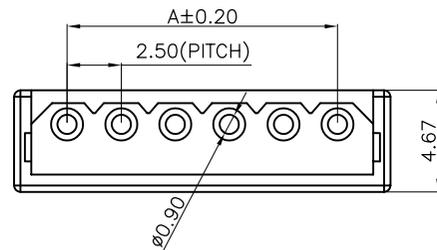


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2021.3.13

**SPECIFICATIONS:**

1. Operation temperature : -25~+85° C;
2. Current rating: 3.0A;
3. Voltage rating: 250V DC/AC;
4. Contact resistance: 20mΩ max;
5. Insulation resistance: 1000MΩ min;
6. Dielectric voltage: 1000V AC /1minute;
7. Insulation material: PA or PBT UL94V-2;

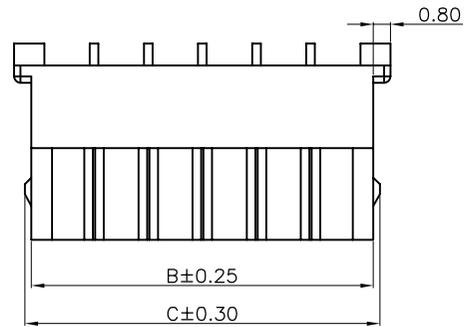

孔数	A	B	C
2	2.50	5.80	6.40
3	5.00	8.30	8.90
4	7.50	10.80	11.40
5	10.00	13.30	13.90
6	12.50	15.80	16.40
7	15.00	18.30	18.90
8	17.50	20.80	21.40
9	20.00	23.30	23.90
10	22.50	25.80	26.40
11	25.00	28.30	28.90
12	27.50	30.80	31.40
13	30.00	33.30	33.90
14	32.50	35.80	36.40
15	35.00	38.30	38.90
16	37.50	40.80	41.40

**浙江快利电子有限公司**  
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3'	X.: ±0.35
.X: ± 2'	X.X: ±0.25
.XX: ± 1'	X.XX: ±0.15
.XXX: ± 0.5'	X.XXX: ±0.10

DESIGN:	HELLER	DATE:	2021-03-13
CHECKED:	王子林	DATE:	2021-03-13
APPROVED:	朱建慧	DATE:	2021-03-13

DWG. NO.	
PART NO.	KL-5264-NY-01-W

TITLE.	5264-NY
--------	---------

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	