

1 2 3 4 5 6 7 8 9




**ROHS**

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	
A1	20230619001	更新图面	KEVIN	2023.06.19


Specifications / 技术规格:

Current rating: 5A  
 额定电流: 5A  
 Voltage rating: 250V AC,DC  
 额定电压: 250V AC,DC  
 Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ  
 Dielectric Withstanding: 1500V AC 1Min  
 耐电压: 1500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到85°C

Materials / 材料:  
 Insulation Material: Nylon UL94V-2  
 绝缘体塑胶材质: 尼龙 UL94 V-2

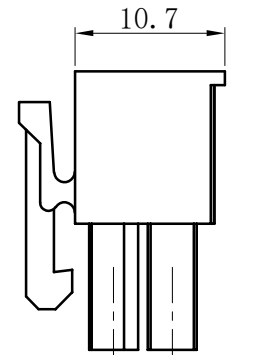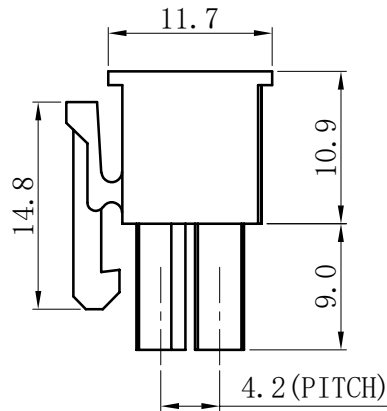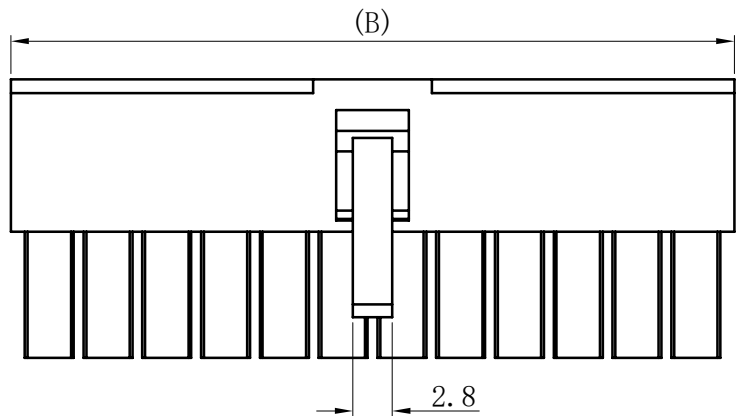

5557-2X1Y  
 5557-2X2Y

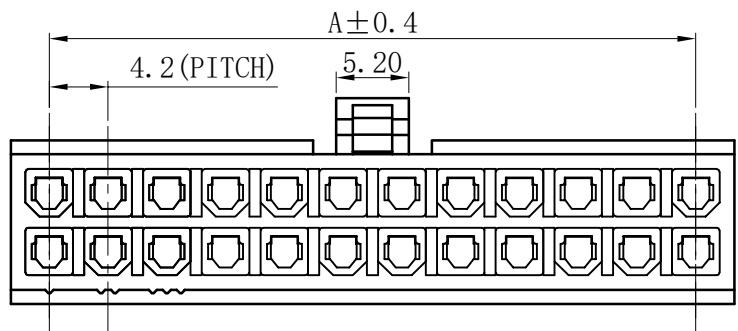

孔数	尺寸 (mm)	
	A	B
2X1	/	5.40
2X2	4.20	9.60
2X3	8.40	13.80
2X4	12.60	18.00
2X5	16.80	22.20
2X6	21.00	26.40
2X7	25.20	30.60
2X8	29.40	34.80
2X9	33.60	39.00
2X10	37.80	43.20
2X11	42.00	47.40
2X12	46.20	51.60

浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE

X.* ± 3'	.XXX: ±0.10
.X' ± 2'	.XX : ±0.20
.XX* ± 1'	.X : ±0.30
.XXX* ± 0.5'	X. : ±0.35

DESIGN: KEVIN

DATE: 2016-1-3

DWG. NO.

TITLE.

CHECKED: 张国旭

DATE: 2023.06.19

AUDITED: 朱继衡

DATE: 2023.06.19

APPROVED: 王子林

DATE: 2023.06.19

PART NO.

KL-5557-2XNY-01-W

5557-2XNY

REV.	UNIT.	SCALE.	
A1	MM	1:1	

1 2 3 4 5 6 7 8 9