

ROHS




| REV. | ECN NO | DESCRIPTION | REVISED | DATE     |
|------|--------|-------------|---------|----------|
| A    |        | 新订图面        | HELLER  | 21.09.16 |

Specifications / 技术规格:

Current rating: 5A  
 额定电流: 5A  
 Voltage rating: 250V AC,DC  
 额定电压: 250V AC,DC  
 Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ  
 Dielectric Withstanding: 1500V AC 1Min  
 耐电压: 1500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到85°C

Materials / 材料:

Insulation Material: Nylon UL94V-2  
 绝缘体塑胶材质: 尼龙 UL94V-2

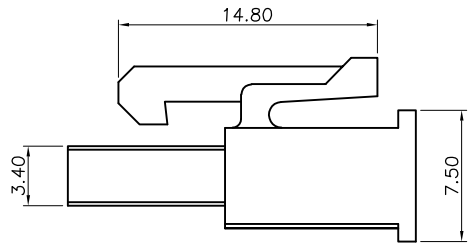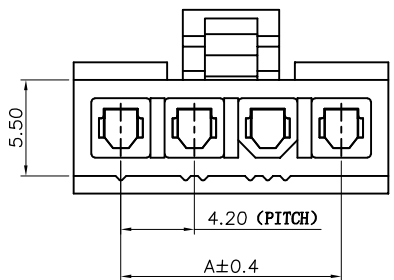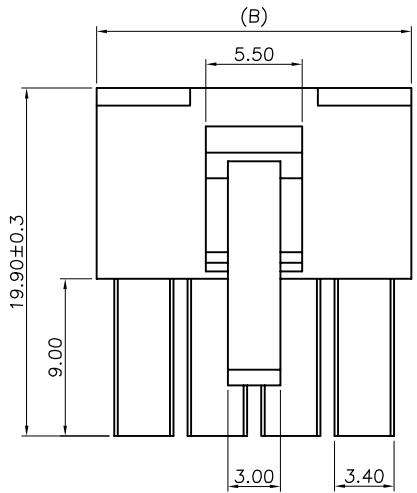

| P N 位 | A    | B    |
|-------|------|------|
| 2     | 4.2  | 9.6  |
| 3     | 8.4  | 13.8 |
| 4     | 12.6 | 18.0 |
| 5     | 16.8 | 22.2 |
| 6     | 21.0 | 26.4 |
| 7     | 25.2 | 30.6 |
| 8     | 29.4 | 34.8 |
| 9     | 33.6 | 39.0 |
| 10    | 37.8 | 43.2 |
| 11    | 42.0 | 47.4 |
| 12    | 46.2 | 51.6 |

 浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd


| GENERAL TOLERANCE |           |
|-------------------|-----------|
| X.* ± 3'          | .XXX --   |
| .X* ± 2'          | .XX ±0.20 |
| .XX* ± 1'         | .X ±0.30  |
| .XXX* ± 0.5'      | X.* --    |

DESIGN: HELLER  
 CHECKED: 张国旭  
 APPROVED: 王子林

DATE: 2021-09-16  
 DATE: 2023-06-21  
 DATE: 2023-06-21

DWG. NO.  
 PART NO.  
 KL-5557-NY-01-W

TITLE:  
 5557-NY

|        |          |            |   |
|--------|----------|------------|---|
| REV. A | UNIT. MM | SCALE. 1:1 |  |
|--------|----------|------------|---|