

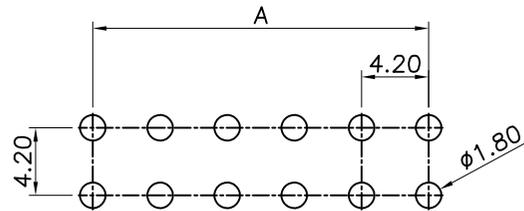
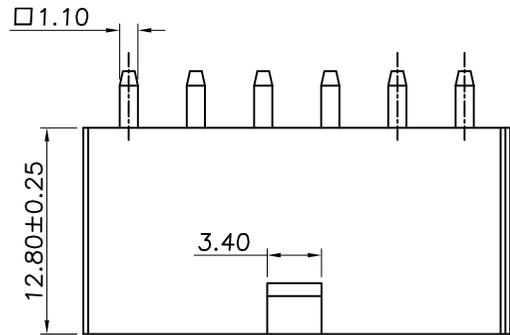


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	21.06.21
A1	20230705001	增加台阶	HELLER	23.07.05

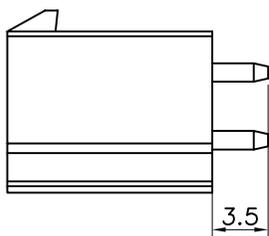

Recommended P.C.Board Hole Layout

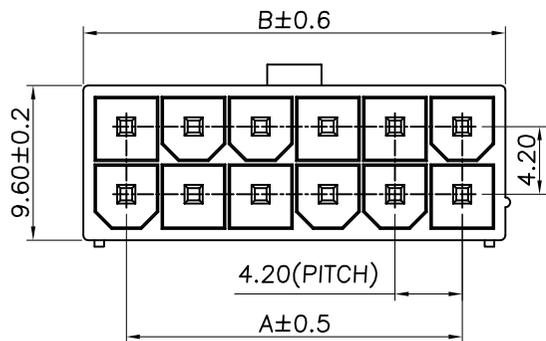

Specifications / 技术规格:

Current rating: 5A
 额定电流: 5A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

CKT	A	B
2X1	/	5.40
2X2	4.20	9.60
2X3	8.40	13.80
2X4	12.60	18.00
2X5	16.80	22.20
2X6	21.00	26.40
2X7	25.20	30.60
2X8	29.40	34.80
2X9	33.60	39.00
2X10	37.80	43.20
2X11	42.00	47.40
2X12	46.20	51.60
2X13	50.40	55.80
2X14	54.60	60.00
2X15	58.80	64.20
2X16	63.00	68.40

Materials / 材料:

Contact Material: Brass(Tin plated)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: Nylon UL94V-2
 绝缘塑胶材质: 尼龙 UL94 V-2

 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	.XXX --
.X* ± 2'	.XX ±0.20
.XX* ± 1'	.X ±0.30
.XXX* ± 0.5'	X.* --

DESIGN:	HELLER	DATE:	2023.07.06
CHECKED:	张国旭	DATE:	2023.07.06
AUDITED:	朱继衡	DATE:	2023.07.06
APPROVED:	王子林	DATE:	2023.07.06

DWG. NO.	PART NO. KL-5569-2XNA-09-TR
TITLE.	

TITLE.
5569-2XNA

REV.	A1	UNIT.	MM	SCALE.	1:1	
------	----	-------	----	--------	-----	--