


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	21.06.21
A1	20230705001	增加台阶	HELLER	23.07.05




Specifications / 技术规格:

Current rating: 5A
 额定电流: 5A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:
 Contact Material: Brass(Tin plated)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: Nylon UL94V-2
 绝缘塑胶材质: 尼龙 UL94 V-2

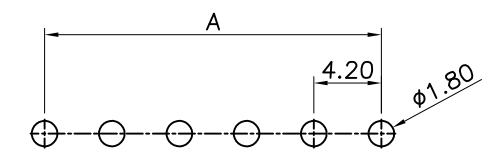

Recommended P.C.Board Hole Layout

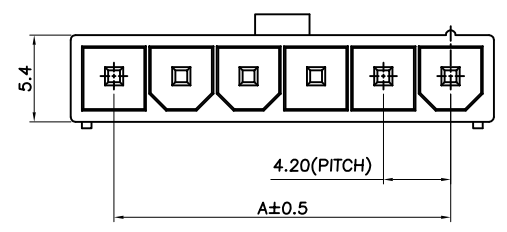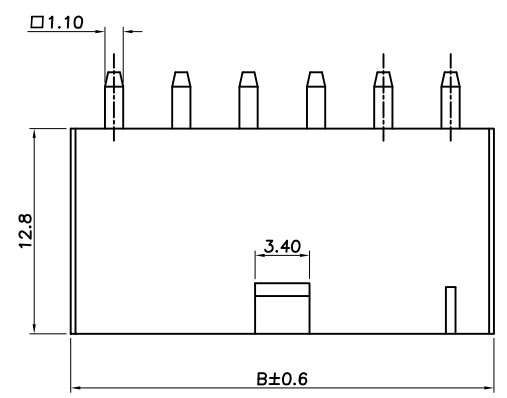

CKT	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40
7	25.20	30.60
8	29.40	34.80
9	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60
13	50.40	55.80
14	54.60	60.00
15	58.80	64.20
16	63.00	68.40

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

REV.	A1	UNIT.	MM	SCALE.	1:1	
------	----	-------	----	--------	-----	--

GENERAL TOLERANCE	
X.* ± 3'	.XXX --
.X* ± 2'	.XX ±0.20
.XX* ± 1'	.X ±0.30
.XXX* ± 0.5'	X. --

DESIGN:	HELLER	DATE:	2023.07.06
CHECKED:	张国旭	DATE:	2023.07.06
AUDITED:	朱继衡	DATE:	2023.07.06
APPROVED:	王子林	DATE:	2023.07.06

DWG. NO.	
PART NO.	KL-5569-NA-09-TR

TITLE.	5569-NA
--------	---------