


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		New drawing	徐民建	24.01.08

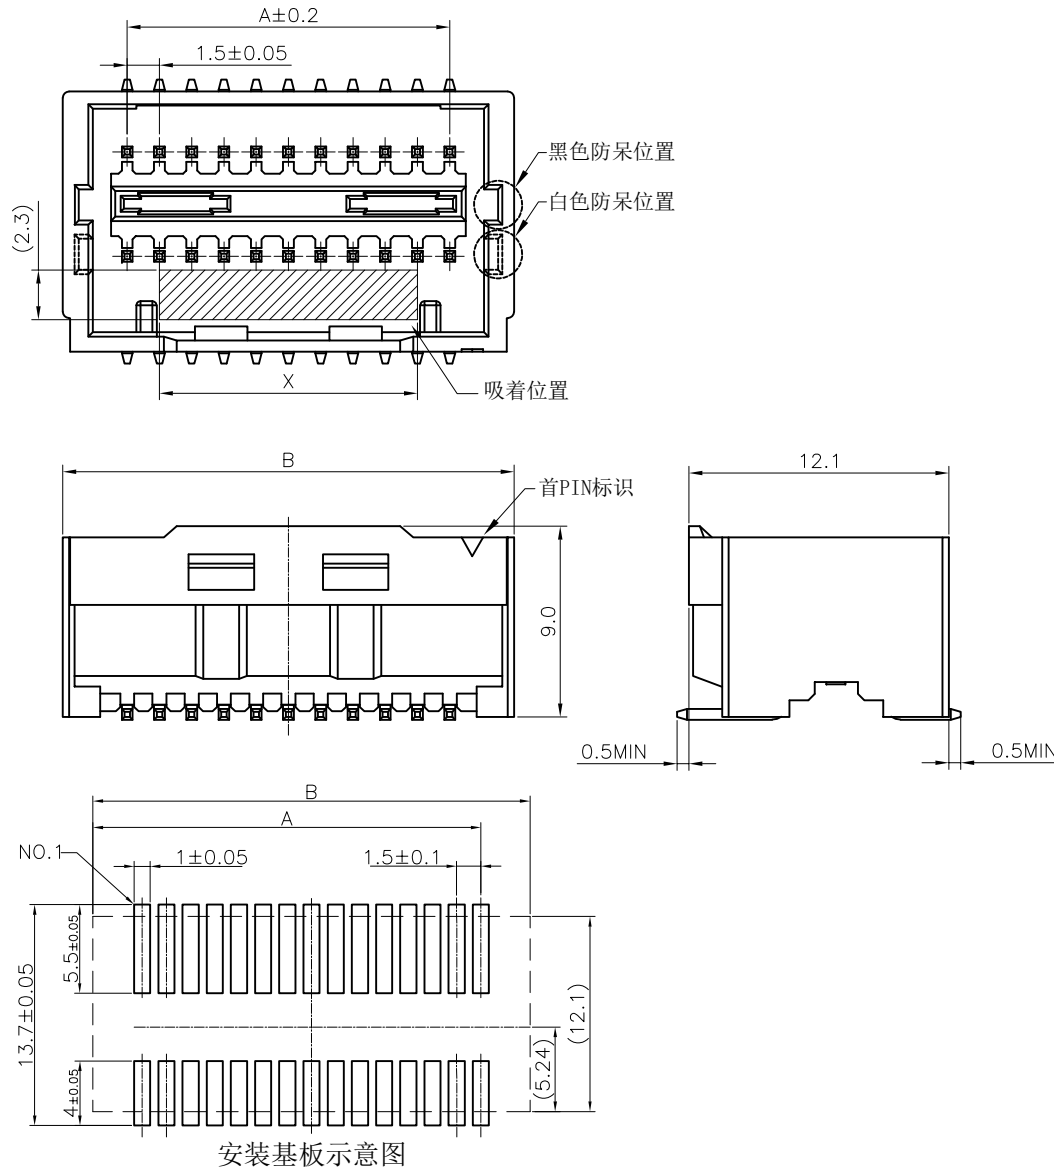

Specifications / 技术规格:

Current Rating: 2A AC,DC(24AWG)

额定电流: 2A AC,DC(24AWG)

Voltage rating: 100V AC,DC

额定电压: 100V AC,DC

Insulation Resistance: 500MΩ Min.

绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC

耐电压: 500V AC

Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA/LCP UL94 V-0 Natural/Black

CKT	A	B	X
2*5	6.00	12.00	5.55
2*6	7.50	13.50	5.55
2*7	9.00	15.00	8.50
2*8	10.50	16.50	8.50
2*9	12.00	18.00	8.50
2*10	13.50	19.50	12.00
2*11	15.00	21.00	12.00
2*12	16.50	22.50	12.00
2*13	18.00	24.00	12.00
2*14	19.50	25.50	17.85
2*15	21.00	27.00	17.85
2*16	22.50	28.50	17.85
2*17	24.00	30.00	17.85
2*18	25.50	31.50	21.45
2*19	27.00	33.00	21.45
2*20	28.50	34.50	21.45

浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.° : ±3°	X. : --
.X° : ±2°	X.X: ±0.30
.XX° : ±1°	X.XX: ±0.20
.XXX° ±0.5°	X.XXX: ±0.10

DESIGN:	徐民建	DATE:	2024. 1. 8
CHECKED:	王子林	DATE:	2024. 1. 8
APPROVED:	朱建华	DATE:	2024. 1. 8

DWG. NO.	
PART NO.	KL-A1501-2*NALT

TITLE:	A1501-2*NALT
--------	--------------

REV.	UNIT.	SCALE.	PAGE.	PROJ.
A	mm	-	1/1	