
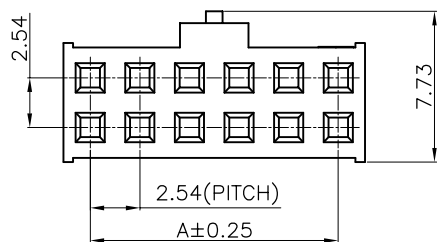



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2020.8.13

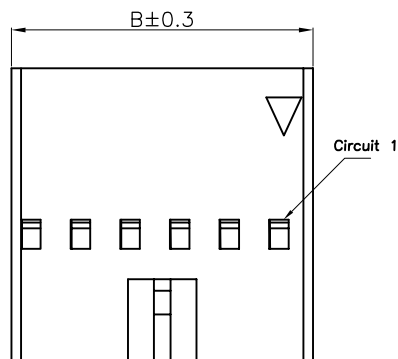

孔数	A	B
2X3	5.08	7.83
2X4	7.62	10.37
2X5	10.16	12.91
2X6	12.70	15.45
2X7	15.24	17.99
2X8	17.78	20.53
2X9	20.32	23.07
2X10	22.86	25.61
2X11	25.40	28.15
2X12	27.94	30.69
2X13	30.48	33.23
2X14	33.02	35.77
2X15	35.56	38.31
2X16	38.10	40.85
2X17	40.64	43.39
2X18	43.18	45.93
2X19	45.72	48.47
2X20	48.26	51.01

Specifications / 技术规格:

Current Rating: 3A

额定电流: 3A

Voltage rating: 250V AC,DC

额定电压: 250V AC, DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1000V AC

耐电压: 1000V AC

Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: Nylon UL94V-2 Black

绝缘体塑胶材料: 尼龙 UL94V-2 黑色

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X.: ±3°	X.: ±0.35
.X: ±2°	X.X: ±0.25
.XX: ±1°	X.XX: ±0.15
.XXX: ±0.5°	X.XXX: ±0.10

DESIGN: 瞿益远

DATE: 2020-08-13

DWG. NO.

TITLE.

CHECKED:

DATE:

PART NO.

A2541-2XNY

APPROVED:

DATE:

KL-A2541-2XNY

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	