

RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	张国旭	2023. 11. 04





Specifications 技术规格:

Current rating: 5A
 额定电流: 5A
 Voltage rating: 250V AC, DC
 额定电压: 250V AC, DC
 Insulation Resistance: 1000MW Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1500V AC 1Min
 耐电压: 1500V AC 1分钟
 Contact Resistance: 20m Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25° C to +85° C
 工作温度: -25° C 到 85° C

Materials 材料:

Insulation Material: Nylon UL94V-0/2
 绝缘体塑胶材质: 尼龙 UL94 V-0/2

PIN 数	DIM			
	A	B	C	D
2X1	5.4	/	12.1	16.3
2X2	9.6	4.2	15.6	19.8
2X3	13.8	8.4	20.5	24.0
2X4	18.0	12.6	24.7	28.2
2X5	22.2	16.8	28.9	32.4
2X6	26.4	21.0	33.1	36.6
2X7	30.6	25.2	37.3	40.8
2X8	34.8	29.4	41.5	45.0
2X9	39.0	33.6	45.7	49.2
2X10	43.2	37.8	49.9	53.4
2X11	47.4	42.0	54.1	57.6
2X12	51.6	46.2	58.3	61.8

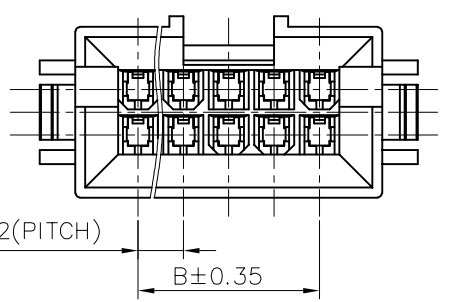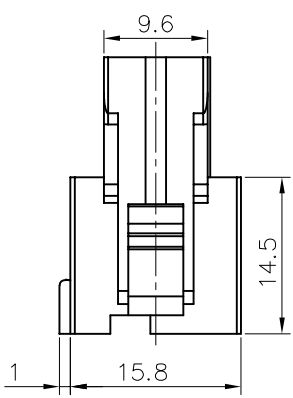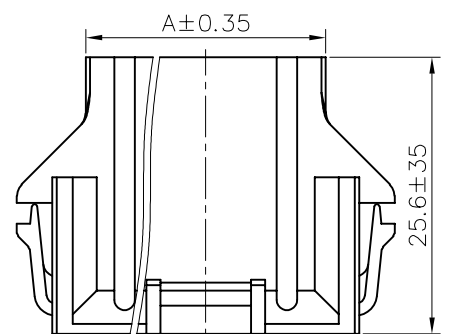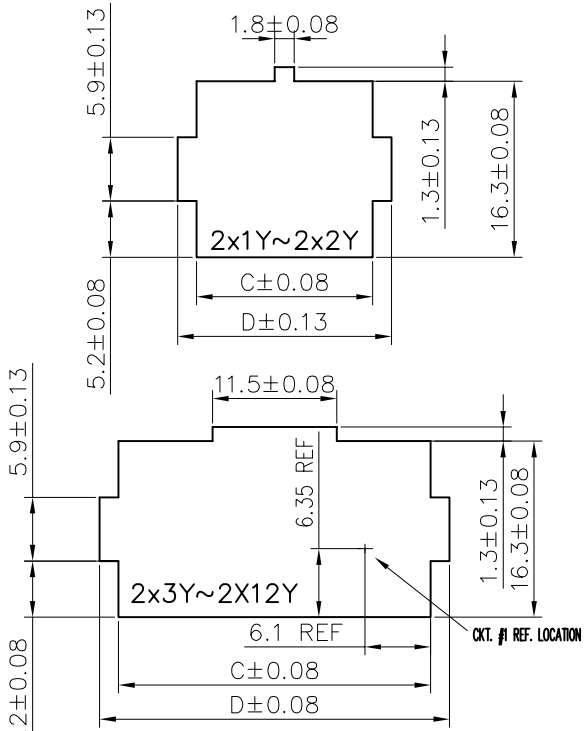

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd


GENERAL TOLERANCE	
X. ° ± 3°	.XXX ± 0.10
.X ° ± 2°	.XX ± 0.25
.XX ° ± 1°	.X ± 0.35
.XXX ° ± 0.5°	X. ± 0.50

DESIGN:	张国旭	DATE:	2023. 11. 04
CHECKED:	王鑫	DATE:	2023. 11. 04
AUDITED:	朱继衡	DATE:	2023. 11. 04
APPROVED:	王子林	DATE:	2023. 11. 04

DWG. NO.	KL-C4201M-2xNY-09-W
PART NO.	
TITLE:	

C4201M-2xNY




REV.	A	UNIT.	MM	SCALE.	1:1
------	---	-------	----	--------	-----






RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	张国旭	2023. 11. 04




F

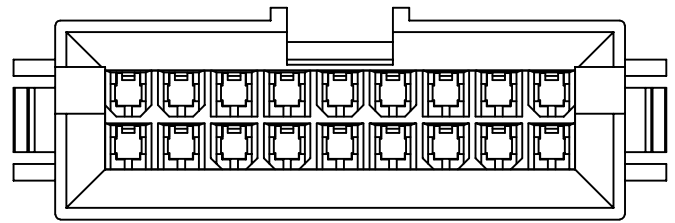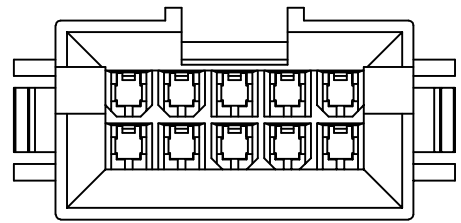




E

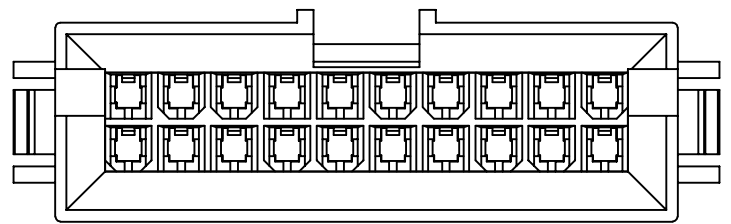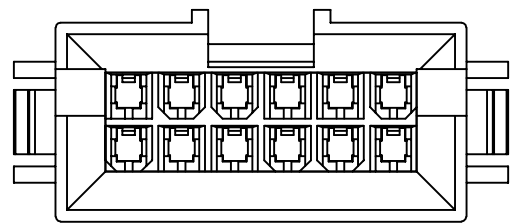

D

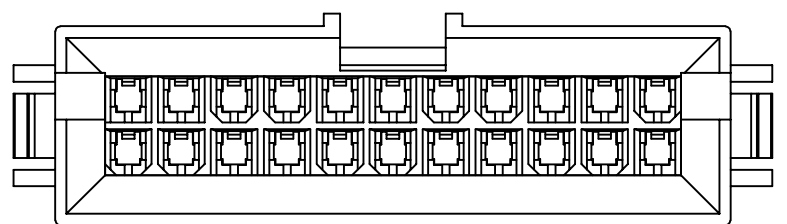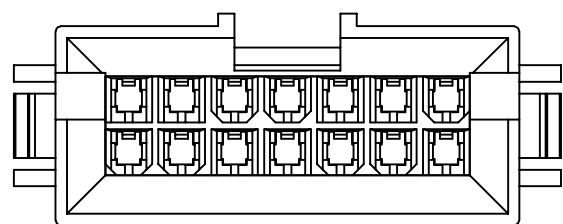

C

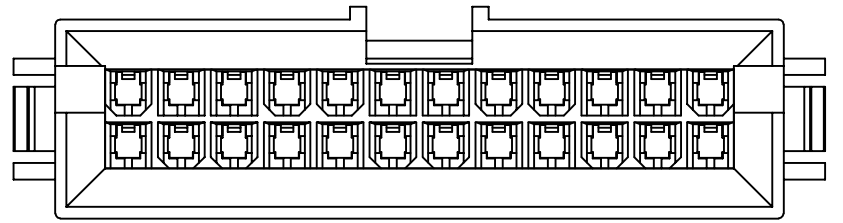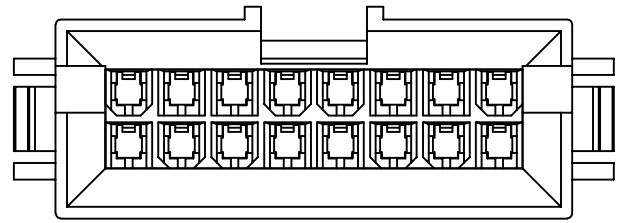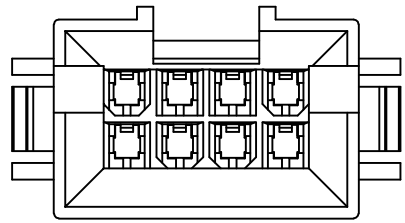

B

A

 浙江快利电子有限公司
Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. ° ± 3°	.XXX ± 0.10
.X ° ± 2°	.XX ± 0.25
.XX ° ± 1°	.X ± 0.35
.XXX ° ± 0.5°	X. ± 0.50

DESIGN: 张国旭
CHECKED: 王鑫
AUDITED: 朱继衡
APPROVED: 王子林

DATE: 2023. 11. 04
DATE: 2023. 11. 04
DATE: 2023. 11. 04
DATE: 2023. 11. 04

DWG. NO.
PART NO.
KL-C4201M-2xNY-09-W

TITLE.
C4201M-2xNY

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	---

1 2 3 4 5 6 7 8 9