

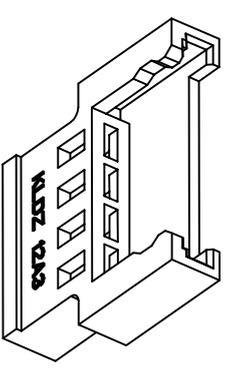
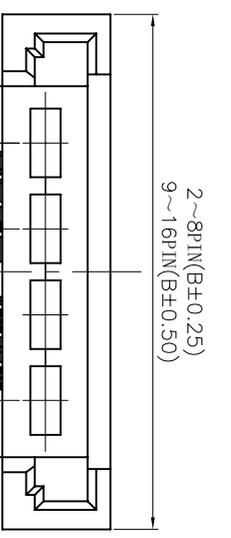


REV.	ECN NO.	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

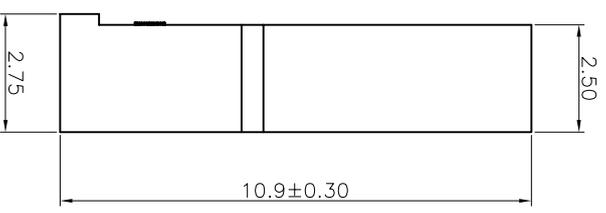

2~8PIN(A±0.20)  
9~16PIN(A±0.45)

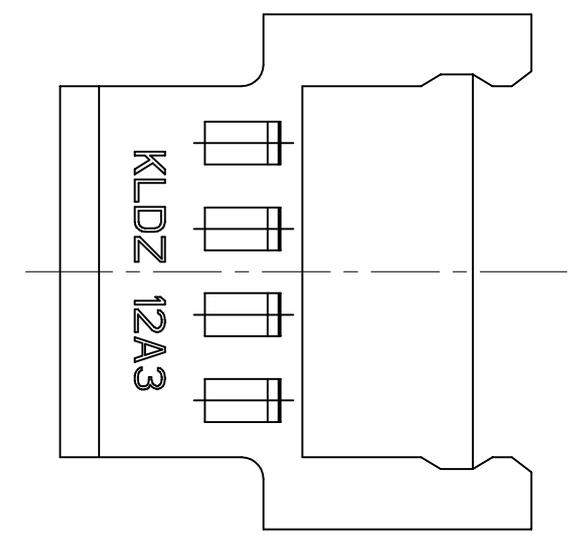

孔位 POLES	尺寸DIM (mm)	
	A	B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

- 备注:
1. 材料:PA 或 PBT UL94V-2 本色
  2. 额定电流: 2A
  3. 额定电压: 125V AC, DC
  4. 接触电阻: 20mΩ MAX
  5. 耐电压: 500V AC
  6. 绝缘电阻: 1000MΩ MIN



**浙江快利电子有限公司**

REV. A	UNIT. MM	SCALE. -	
GENERAL TOLERANCE		DESIGN: KEVIN	DATE: 2013-03-25
X° ± 3'	.XXX ± 0.10	CHECKED:	DATE:
X° ± 2'	.XX ± 0.15	APPROVED:	DATE:
.XX° ± 1'	.X ± 0.25		
.XXX° ± 0.5'	X. ± 0.35		

DWG. NO.

PART NO. KI-CB2.0-NA

TITLE.

超薄2.0空中对接母座

CB2.0-NA