
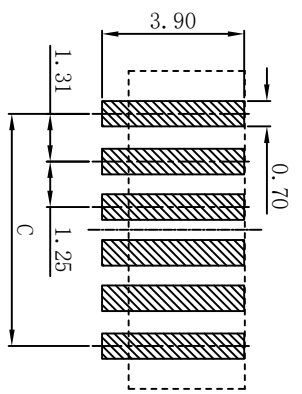

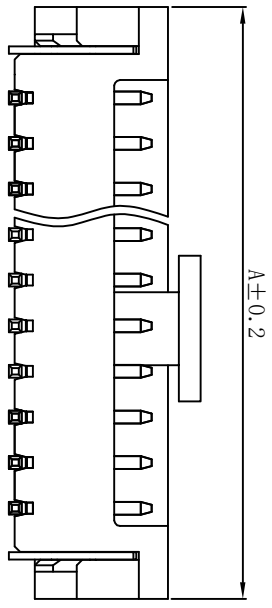


ROHS/HF


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

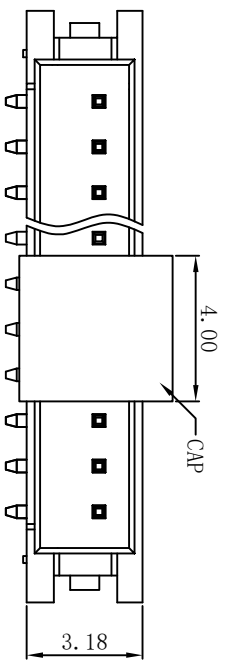

Recommended P.C.Board Hole Layout

Specifications / 技术规格:


Current rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 500M ΩMin.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25° C 到85° C
 Materials / 材料:
 Contact Material: Brass (Tin plating)
 接触端子材料: 黄铜(镀锡)
 Soldering Material: Phos:bronze (Tin plating)
 焊脚材料: 磷铜(镀锡)
 Insulation Material: LCP or PA UL94V-0
 绝缘体塑胶材质: LCP 或 PA UL94V-0

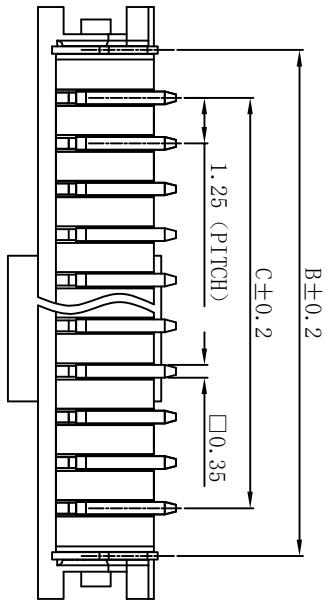

P数	DIM=A	DIM=B	DIM=C
16	23.75	21.37	18.75
15	22.50	20.12	17.50
14	21.25	18.87	16.25
13	20.00	17.62	15.00
12	18.75	16.37	13.75
11	17.50	15.12	12.50
10	16.25	13.87	11.25
9	15.00	12.62	10.00
8	13.75	11.37	8.75
7	12.50	10.12	7.50
6	11.25	8.87	6.25
5	10.00	7.62	5.00
4	8.75	6.37	3.75
3	7.50	5.12	2.50
2	6.25	3.87	1.25

GENERAL TOLERANCE

X' ± 3'	6以下: ±0.10	DESIGN:	KEYVIN	DATE:	15'.3.10	DWG. NO.	
X' ± 2'	10以下: ±0.15	CHECKED:	朱前程	DATE:	15'.3.10		
.XX' ± 1'	20以下: ±0.25	AUDITED:	张宁	DATE:	15'.3.10	PART NO.	KL-DF13-NALT
.XXX' ± 0.5'	50以下: ±0.35	APPROVED:	朱建华	DATE:	15'.3.10		



浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

REV.	UNIT.	SCALE.	
A	MM	1:1	

TITLE:
DF13-NALT 立式贴片