





ROHS/HF

Specifications / 技术规格:

Current Rating: 1A
 额定电流: 1A
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-0
 绝缘体塑胶材料: PA 或 PBT UL94V-0

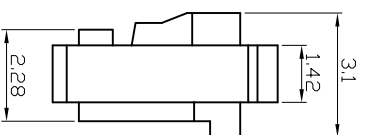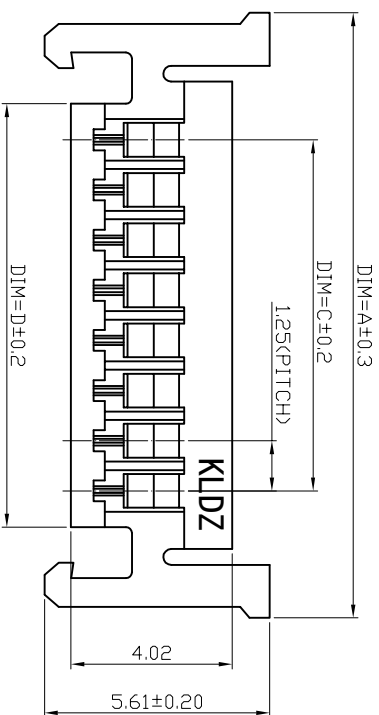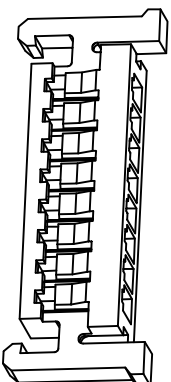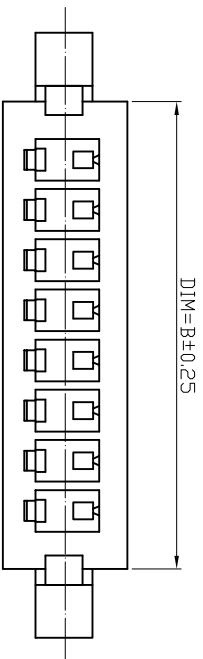

P#	DIM=A	DIM=B	DIM=C	DIM=D
16	25.08	21.65	18.75	20.55
15	23.83	20.40	17.50	19.30
14	22.58	19.15	16.25	18.05
13	21.33	17.90	15.00	16.80
12	20.08	16.65	13.75	15.55
11	18.83	15.40	12.50	14.30
10	17.58	14.15	11.25	13.05
9	16.33	12.90	10.00	11.80
8	15.08	11.65	8.75	10.55
7	13.83	10.40	7.50	9.30
6	12.58	9.15	6.25	8.05
5	11.33	7.90	5.00	6.80
4	10.08	6.65	3.75	5.55
3	8.83	5.40	2.50	4.30
2	7.58	4.15	1.25	3.05



浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

REV. A UNIT. MM SCALE: ---

GENERAL TOLERANCE		DESIGN:	DATE:
X. ± 3'	X.XXX: ±0.10	MARRY	14.10.08
X. ± 2'	X.XX: ±0.15	CHECKED: 叶湖生	DATE: 14.10.08
.XX' ± 1'	X.X: ±0.25	AUDITED: 张宁	DATE: 14.10.08
.XXX' ± 0.5'	X.: ±0.35	APPROVED: 朱建华	DATE: 14.10.08

DWG. NO.	PART NO.	TITLE:
	KL-DF13-NY	DF13-NY