

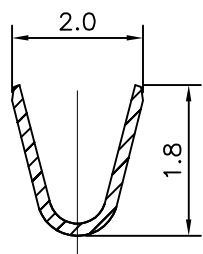
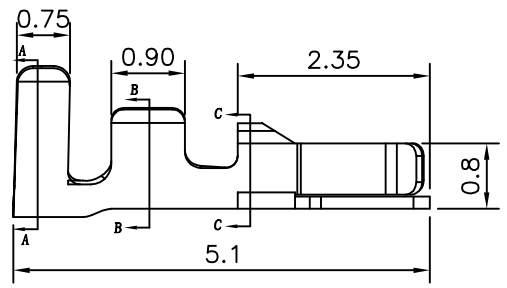



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	李晓明	2016.04.20

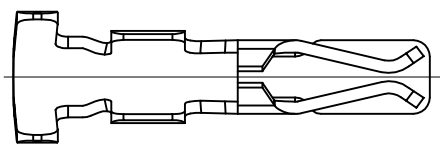


SECT. A-A




SECT. B-B



SECT. C-C

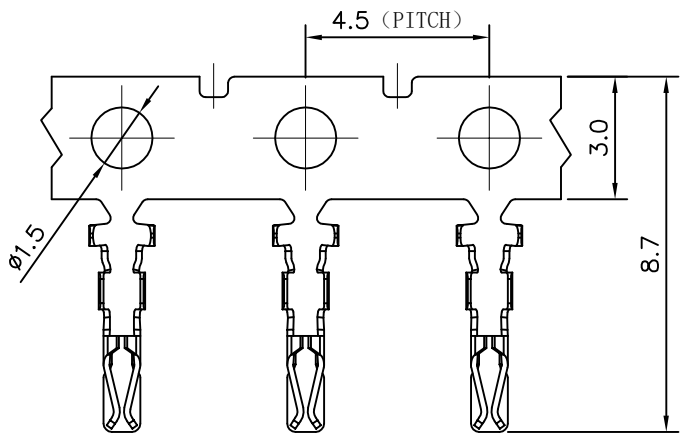

排样图  
SCALE 0.5:1



SC 0.75:1

Specifications / 技术规格:

Current Rating: 1A  
 额定电流: 1A  
 Insulation Resistance: 500 MΩ Min.  
 绝缘电阻: 最小500MΩ  
 Dielectric Withstanding: 500V AC  
 耐电压: 500V AC  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到 85°C

Materials / 材料:  
 Contact Material: Phosphor Bronze  
 接触端子材料: 磷铜  
 Finish: Tin plated  
 表面处理: 镀锡。

**浙江快利电子有限公司**  
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X° ± 3'	X. ±0.35
.X° ± 2'	.X ±0.25
.XX° ± 1'	.XX ±0.15
.XXX° ± 0.5'	.XXX ±0.10

DESIGN:	李晓明	DATE:	16'.4.20
CHECKED:	李晓明	DATE:	16'.4.20
AUDITED:	张宁	DATE:	16'.4.20
APPROVED:	朱建华	DATE:	16'.4.20

DWG. NO.	KL-DF14-TE
PART NO.	

TITLE.	DF14-TE
--------	---------

REV.	A	UNIT.	MM	SCALE.	---