

1 2 3 4 5 6 7 8 9




**ROHS**

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

Specifications / 技术规格:

Current rating: 3A  
 额定电流: 3A  
 Voltage rating: 250V AC, DC  
 额定电压: 250V AC, DC  
 Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ  
 Dielectric Withstanding: 1000V AC 1Min  
 耐电压: 1000V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到 85°C

Materials / 材料:  
 Insulation Material: PA or PBT UL94V-2

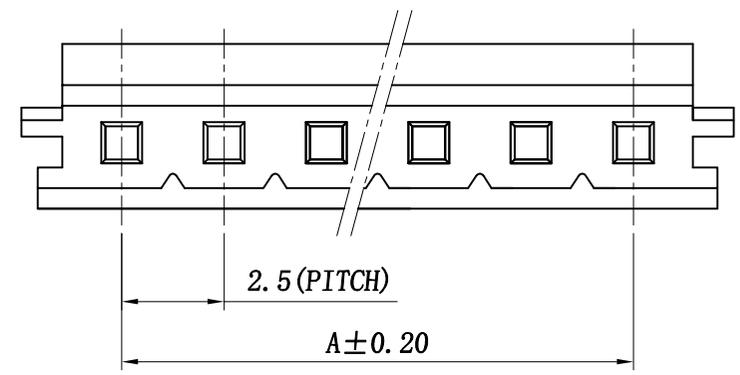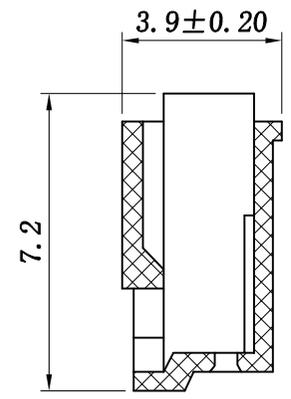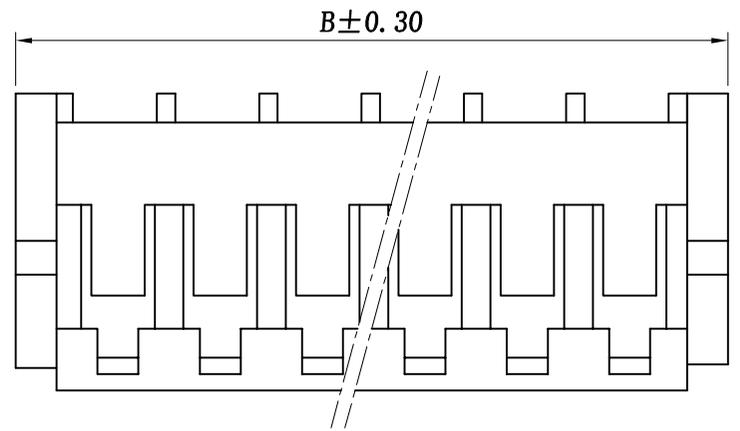

孔数	A	B
2	2.50	7.00
3	5.00	9.50
4	7.50	12.00
5	10.00	14.50
6	12.50	17.00
7	15.00	19.50
8	17.50	22.00
9	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50
16	37.50	42.00

浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. ± 3'	.XXX : --
.X ± 2'	.XX : ±0.20
.XX ± 1'	.X : ±0.30
.XXX ± 0.5'	X. : --

DESIGN:	KEVIN	DATE:	2015-3-10
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	KL-EH-NY

TITLE:  
 EH-NY连接器

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9