

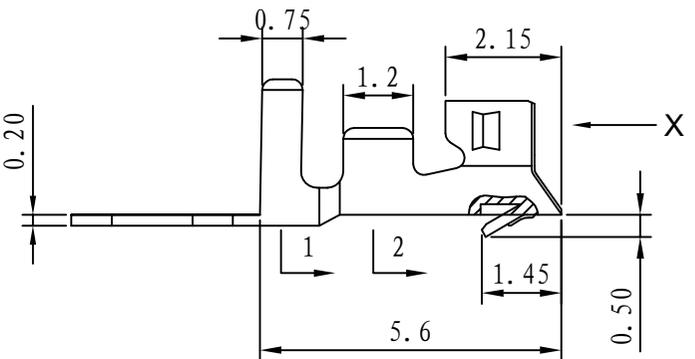




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.4.15

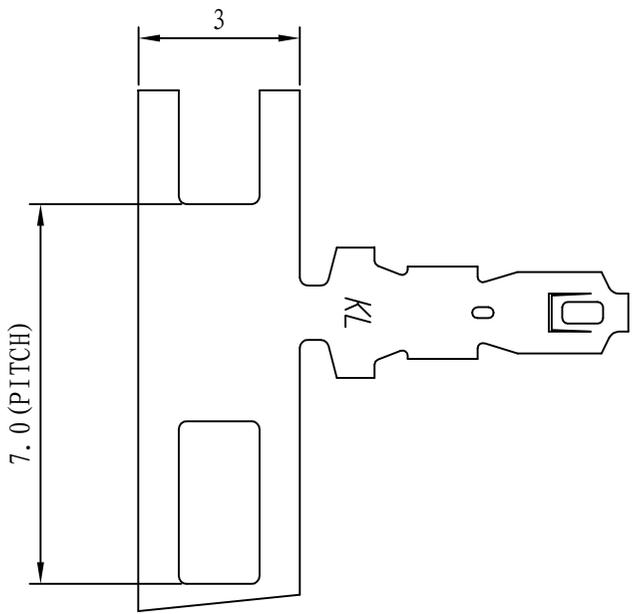

Specifications /技术规格:

Current Rating: 3A
 额定电流: 3A

Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1000V AC
 耐电压: 1000V AC

Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials /材料:

Contact Material: Phosphor Bronze(Tin plating)
 接触端子材料: 磷铜(镀锡)

 浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.


GENERAL TOLERANCE	
X.: ± 3°	X.: ±0.35
.X: ± 2°	X.X: ±0.25
.XX: ± 1°	X.XX: ±0.15
.XXX: ± 0.5°	X.XXX: ±0.10

DESIGN:	KEVIN	DATE:	2015-04-15
CHECKED:	李晓明	DATE:	2015-04-15
APPROVED:	朱建华	DATE:	2015-04-15

DWG. NO.	KL-EH-TE
PART NO.	

TITLE:

EH-TE

REV. A	UNIT. mm	SCALE. -	PAGE. 1/1	PROJ. 
--------	----------	----------	-----------	---