
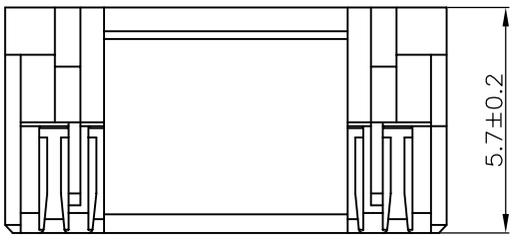

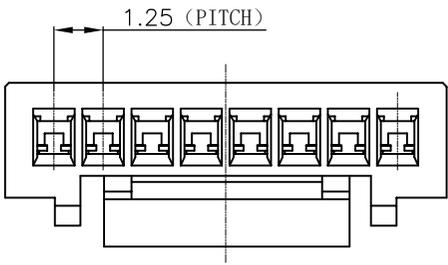


1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	刘喜梅	2012.3.21

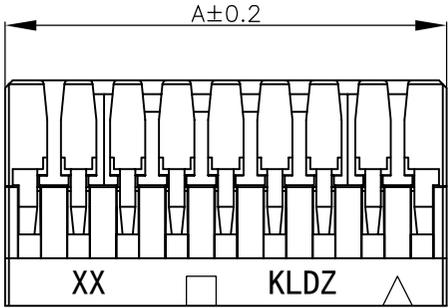

孔数	A
2	3.75
3	5.00
4	6.25
5	7.50
6	8.75
7	10.00
8	11.25
9	12.50
10	13.75
11	15.00
12	16.25
13	17.50
14	18.75
15	20.00
16	21.25
17	22.50
18	23.75
19	25.00
20	26.25

Specifications / 技术规格:
 Current Rating: 1A
 额定电流: 1A
 Insulation Resistance: 500M MinΩ
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C
 Materials / 材料:
 Insulation Material: PA OR PBT UL94 V-0
 绝缘体塑胶材料: PA或PBT UL94 V-0

 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X* ± 3'	.XXX --
.X* ± 2'	.XX ±0.20
.XX* ± 1'	.X ±0.30
.XXX* ± 0.5'	X. --

DESIGN: 刘喜梅
 DATE: 12'.3.21
 CHECKED: 朱建慧
 DATE: 12'.3.21
 APPROVED: 朱建华
 DATE: 12'.3.21

DWG. NO.
 PART NO.
 KL-GH-NY

TITLE.
 GH-NY

REV. A UNIT. MM SCALE. --- 

1 2 3 4 5 6 7 8 9