
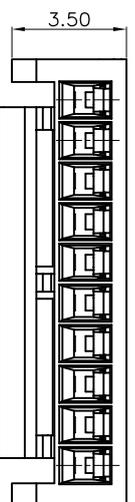

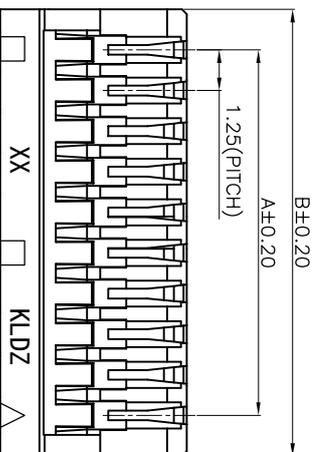



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2020.06.13

孔数	DIM		
	A	B	C
10	11.25	13.75	10.80
11	12.50	15.00	12.05
20	23.75	26.25	16.40

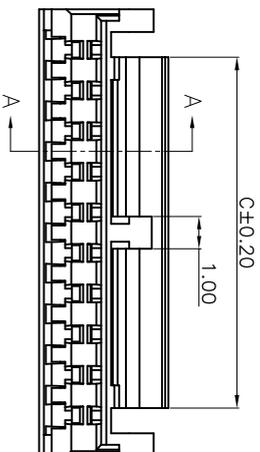

Specifications / 技术规格:

- Current Rating: 1A
额定电流: 1A
- Voltage rating: 50V AC,DC
额定电压: 50V AC,DC
- Insulation Resistance: 500MΩ Min.
绝缘电阻: 最小500MΩ
- Dielectric Withstanding: 500V AC
耐电压: 500V AC
- Operating Temperature: -25°C to +85°C
工作温度: -25° C 到 85° C

Materials / 材料:

Insulation Material: PA or PBT UL94V-0
绝缘体塑胶材料: PA 或 PBT UL94V-0



浙江快利电子有限公司
Zhejiang Kaili Electronic Co., LTD

REV. A UNIT. mm SCALE. - PROJ. 

GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO.	TITLE:
X.: ± 3°	X.: ± 0.35	瞿益远	2020-06-13	KL-GHD-NY	GHD-NY
.X.: ± 2°	X.X.: ± 0.25	CHECKED:	DATE:		
.XX.: ± 1°	X.XX.: ± 0.15	APPROVED:	DATE:		
.XXX.: ± 0.5°	X.XXX.: ± 0.10				