
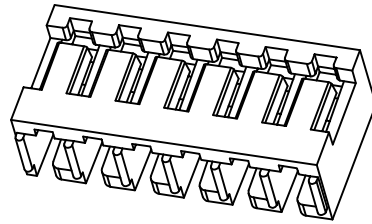



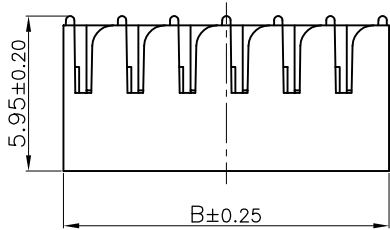


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2018.3.14

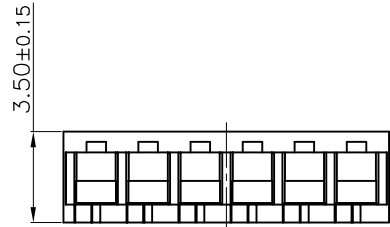

PIN数	尺寸 (mm)	
	A	B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50

SPECIFICATIONS:

1. Operation temperature : -25~+85° C;
2. Current rating: 2.0A;
3. Voltage rating: 250V DC/AC;
4. Insulation resistance: 1000MΩ min;
5. Dielectric voltage: 800V AC /1minute;
6. Environmental requirement: according to ROHS standard.

MATERIAL:

Insulation Material: PA or PBT UL94V-2

浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3'	X. : ±0.35
.X: ± 2'	.X : ±0.25
.XX: ± 1'	.XX : ±0.15
.XXX: ± 0.5'	.XXX: ±0.10

DESIGN:	瞿益远
CHECKED:	
APPROVED:	

DATE:	2018-03-14
DATE:	
DATE:	

DWG. NO.	
PART NO.	KL-JC20-NY

TITLE.	JC20-NY
--------	---------

REV.	A	UNIT.	mm	SCALE.	-	PROJ.	
------	---	-------	----	--------	---	-------	--