
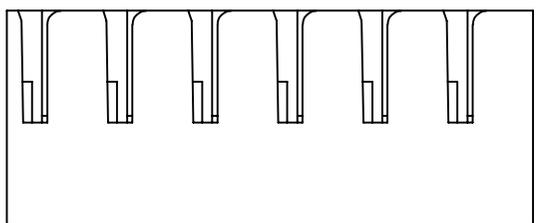
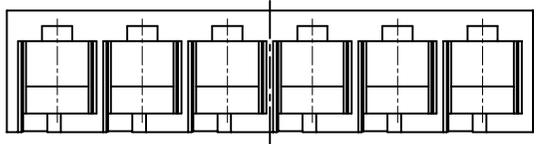

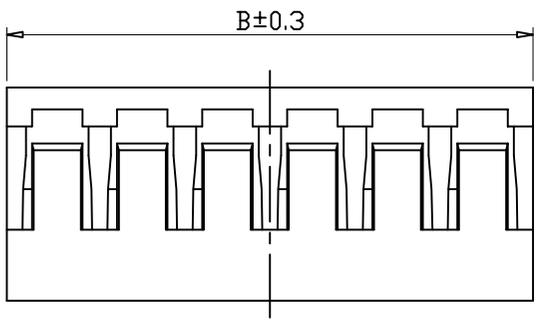
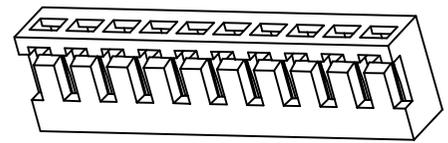


1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2014.3.17

RoHS

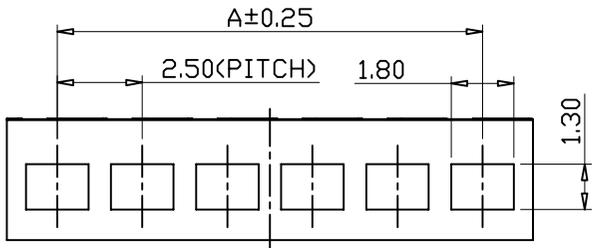

CKT.	DIM(mm)	
	A	B
2	2.50	5.60
3	5.00	8.10
4	7.50	10.60
5	10.00	13.10
6	12.50	15.60
7	15.00	18.10
8	17.50	20.60
9	20.00	23.10
10	22.50	25.60
11	25.00	28.10
12	27.50	30.60
13	30.00	33.10
14	32.50	35.60
15	35.00	38.10
16	37.50	40.60

Specifications / 技术规格:

Current Rating: 3A
 额定电流: 3A
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 1000V AC
 耐压: 1000V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2
 绝缘体塑胶材料: PA 或 PBT UL94V-2

 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd


GENERAL TOLERANCE	
X* ± 3'	.XXX: ±0.10
.X* ± 2'	.XX: ±0.15
.XX* ± 1'	.X: ±0.25
.XXX* ± 0.5'	X: ±0.35

DESIGN:	KEVIN	DATE:	2014-03-17
CHECKED:	叶湖生	DATE:	2014-03-17
AUDITED:	张宁	DATE:	2014-03-17
APPROVED:	朱建华	DATE:	2014-03-17

DWG. NO.	PART NO. KL-JC25-NY
TITLE.	

TITLE:
 JC25-NY

REV.	A	UNIT.	MM	SCALE.	1:1
------	---	-------	----	--------	-----



1 2 3 4 5 6 7 8 9