

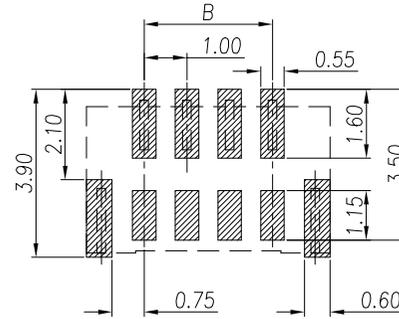
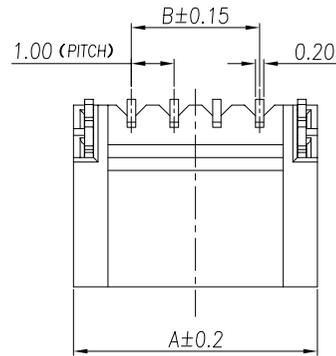




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2021.3.12



RECOMMENDED P.C. BOARD LAYOUT(TOP VIEW)
GENERAL TOLERANCE : ±0.05

PIN	DIM(mm)	
	A	B
2	3.70	1.00
3	4.70	2.00
4	5.70	3.00
5	6.70	4.00
6	7.70	5.00
7	8.70	6.00
8	9.70	7.00
9	10.70	8.00
10	11.70	9.00
11	12.70	10.00
12	13.70	11.00
13	14.70	12.00
14	15.70	13.00
15	16.70	14.00
16	17.70	15.00



规格:

- 材料:
 胶芯材料: PA or LCP UL, 94V-0 本色.
 焊片材料: 铜, 镀镍&锡.
 插针材料: 铜, 镀镍&锡.
- 额定电压: 50V AC.
- 额定电流: 1.0A.
- 接触电阻: 最大40mΩ (试验后量测) .
- 绝缘电阻: 500MΩ.
- 耐电压: 500V/1分钟.
- 操作温度: -25°C~85°C.

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X° ± 3'	X	--
.X° ± 2'	.X	±0.30
.XX° ± 1'	.XX	±0.20
.XXX° ± 0.5'	.XXX	--

DESIGN: HELLER

DATE: 2021.3.12

DWG. NO.

TITLE.

CHECKED: 朱建慧

DATE: 2021.3.12

PART NO.

NH1.0-NALT

APPROVED: 朱建华

DATE: 2021.3.12

KL-NH1.0-NALT-04-BE

REV.	UNIT.	SCALE.	
A	MM	-	