
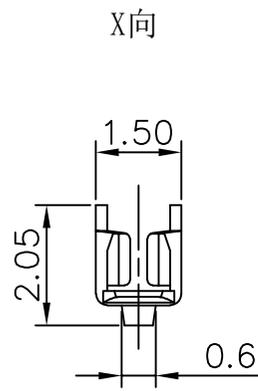



此处刻公司LOGO(KL或KLDZ),具体以实物为准



Specifications 技术规格:

Current Rating: 3A AC, DC (AWG#22)
 额定电流: 3A AC, DC (AWG#22)
 Insulation Resistance: 1000 M Ω Min.
 绝缘电阻: 最小1000M Ω
 Dielectric Withstanding: 800V AC
 耐电压: 800V AC
 Contact Resistance: 20m Ω Max.
 接触电阻: 最大20m Ω
 Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
 工作温度: -25 $^{\circ}$ C 到 85 $^{\circ}$ C

Materials 材料:

Contact Material: Phosphor Bronze (Tin plated)
 接触端子材料: 磷铜 (镀锡)

Recommended wire gauge: AWG28#-24#
 推荐线规: AWG28#-24#


 浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X* \pm 3'	X. \pm 0.35
.X* \pm 2'	.X \pm 0.25
.XX* \pm 1'	.XX \pm 0.15
.XXX* \pm 0.5'	.XXX \pm 0.10

DESIGN:	KEVIN	DATE:	13'.2.20
CHECKED:	SOUL	DATE:	13'.2.20
AUDITED:	张宁	DATE:	13'.2.21
APPROVED:	朱建华	DATE:	13'.2.22

DWG. NO.	-----
PART NO.	KL-PA-TE-2824

TITLE.	PA-TE
--------	-------

REV.	A	UNIT.	MM	SCALE.	----	
------	---	-------	----	--------	------	---