

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2017.3.13
A1	20190616001	调整公差	HELLER	2019.6.16

孔数	型号	尺寸 (mm)	
		A	B
2	PH-2ALT	2.0	8
3	PH-3ALT	4.0	10
4	PH-4ALT	6.0	12
5	PH-5ALT	8.0	14
...	.....	...	...
16	PH-16ALT	30.0	36



**ROHS**

Specifications / 技术规格:



Current rating: 2A  
 额定电流: 2A  
 Voltage rating: 100V AC, DC  
 额定电压: 100V AC, DC  
 Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ  
 Dielectric Withstanding: 800V AC 1Min  
 耐电压: 800V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Brass (Sn plating)  
 接触铜针材料: 黄铜 (镀锡)  
 Soldering Terminal: Bronze (Sn plating)  
 焊片材料: 磷铜 (镀锡)  
 Insulation Material: LCP UL94V-0 Beige  
 绝缘体材料: LCP UL94 V-0 米黄色

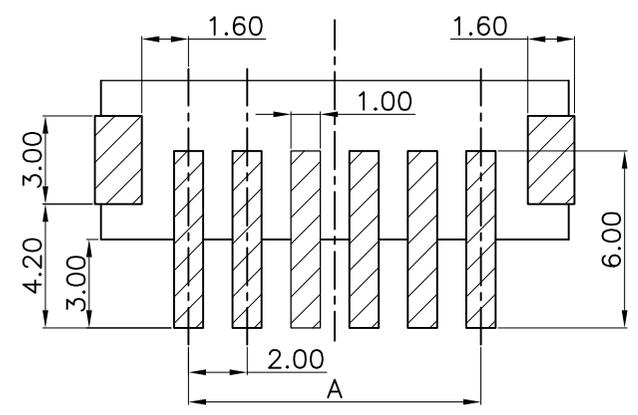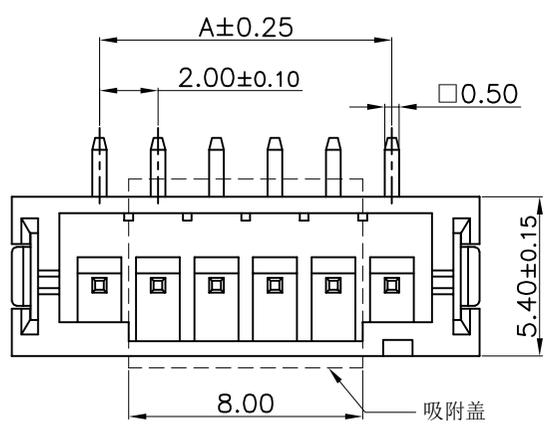

RECOMMENDED P. C. BOARD LAYOUT (TOP VIEW)  
 GENERAL TOLERANCE : ±0.05

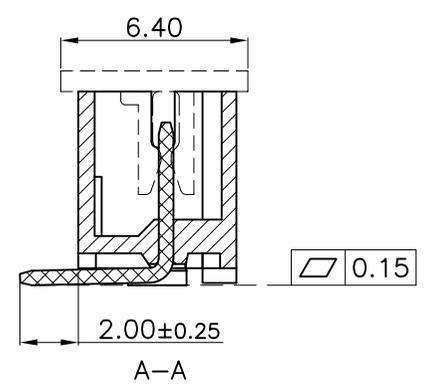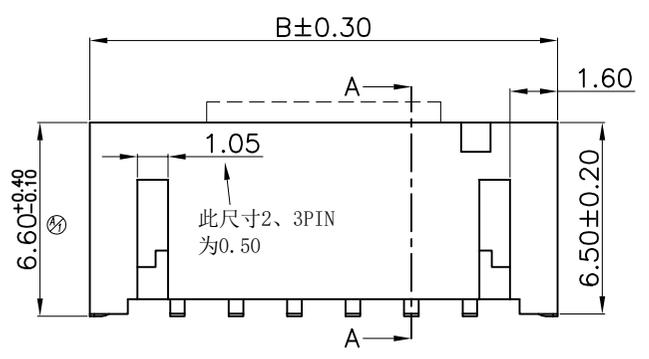

**浙江快利电子有限公司**  
 Zhejiang Kuaili Electronic Co., Ltd

REV. A1 UNIT. MM SCALE. 1:1

GENERAL TOLERANCE	
X.* ± 3'	.XXX ±0.10
.X* ± 2'	.XX ±0.15
.XX* ± 1'	.X ±0.25
.XXX* ± 0.5'	X. ±0.35

DESIGN: HELLER  
 CHECKED: 瞿益远  
 AUDITED: 朱建慧  
 APPROVED: 朱建华

DATE: 2019.6.16  
 DATE: 2019.6.16  
 DATE: 2019.6.16  
 DATE: 2019.6.16

DWG. NO.  
 PART NO.  
 KL-PH-NALT-04-BE  
 TITLE:  
**PH-NALT连接器**