
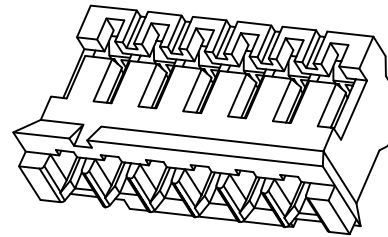
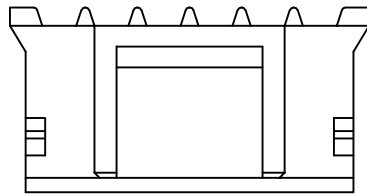
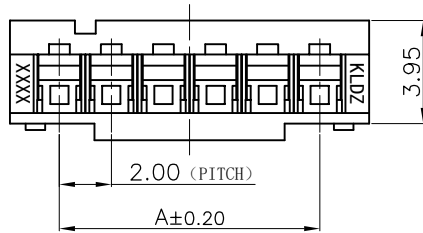



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2017.4.11

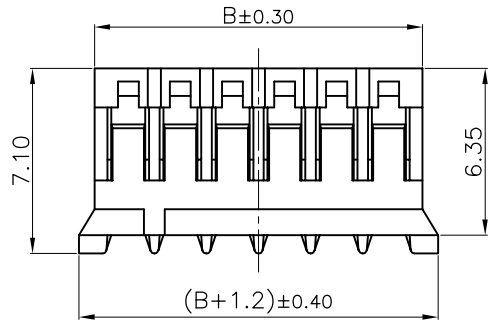

CKT.	尺寸 (mm)	
	A	B
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

SPECIFICATIONS:

1. Operation temperature : -25~+85° C;
2. Current rating: 2.0A;
3. Voltage rating: 100V DC/AC;
4. Insulation resistance: 1000MΩ min;
5. Dielectric voltage: 800V AC /1minute;
6. Environmental requirement: according to ROHS standard.

MATERIAL:

Insulation Material: PA or PBT UL94V-0/2

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3'	X.: --
.X: ± 2'	X.X: ±0.30
.XX: ± 1'	X.XX: ±0.20
.XXX: ± 0.5'	X.XXX: --

DESIGN:	HELLER	DATE:	2017-04-11
CHECKED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	
PART NO.	KL-PH-NY

TITLE.	PH-NY
--------	-------

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	