

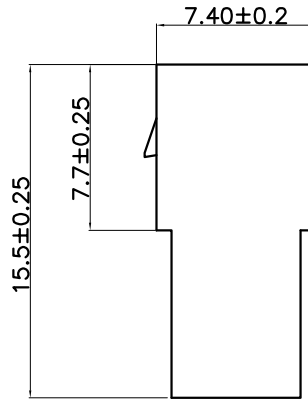
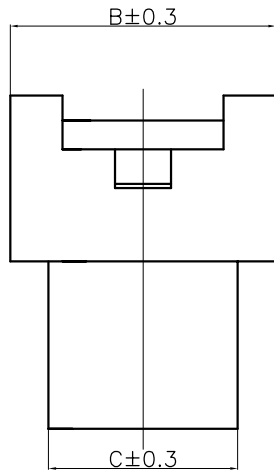


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2023.05.06



Specifications / 技术规格:

Current Rating: 2A AC,DC

额定电流: 2A AC,DC

Voltage rating: 100V AC,DC

额定电压: 100V AC,DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC

耐电压: 800V AC

Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94 V-2 Natural

绝缘体塑胶材料: PA or PBT UL94 V-2 本色

PIN 数	DIM			
	A	B	C	D
2x2	2	8.35	4.8	1.45
2x3	4	10.35	6.8	1.55
2x4	6	12.35	8.8	2.6
2x5	8	14.35	10.8	3.6
2x6	10	16.35	12.8	5.8
2x7	12	18.35	14.8	
2x8	14	20.35	16.8	7.8
2x9	16	22.35	18.8	
2x10	18	24.35	20.8	7.8/13.8
2x11	20	26.35	22.8	
2x12	22	28.35	24.8	13.8
2x13	24	30.35	26.8	
2x14	26	32.35	28.8	13.8
2x15	28	34.35	30.8	
2x16	30	36.35	32.8	13.8
2x17	32	38.35	34.8	
2x18	34	40.35	36.8	13.8
2x19	36	42.35	38.8	
2x20	38	44.35	40.8	13.8

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X.: ± 3'	X.: ± 0.40
.X: ± 2'	X.X: ± 0.30
.XX: ± 1'	X.XX: ± 0.20
.XXX: ± 0.5'	X.XXX: ± 0.10

DESIGN: 徐民建

DATE: 2023-05-06

DWG. NO.

TITLE.

CHECKED: 王子林

DATE: 2023-05-06

PART NO.

PHB-2XNAS

APPROVED: 朱建华

DATE: 2023-05-06

KL-PHB-2XNAS

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	