
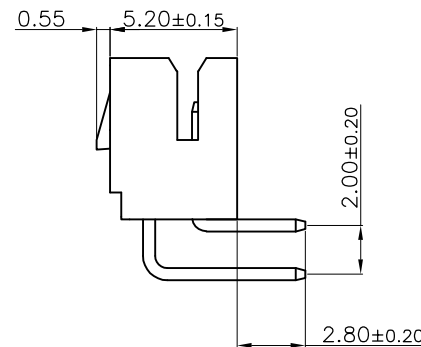
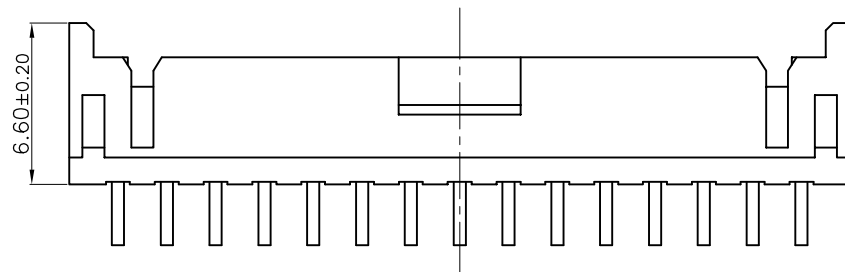
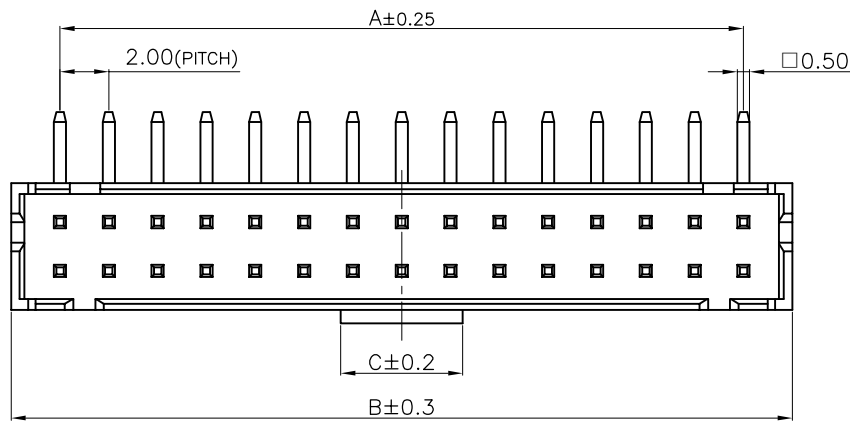


1 2 3 4 5 6 7 8 9

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.6.11

RoHS

CKT.	DM (mm)		
	A	B	C
2X2	2.00	6.00	1.00
2X3	4.00	8.00	3.00
2X4	6.00	10.00	3.00
2X5	8.00	12.00	
2X6	10.00	14.00	
2X7	12.00	16.00	
2X8	14.00	18.00	
2X9	16.00	20.00	
2X10	18.00	22.00	
2X11	20.00	24.00	
2X12	22.00	26.00	
2X13	24.00	28.00	
2X14	26.00	30.00	
2X15	28.00	32.00	
2X16	30.00	34.00	
2X17	32.00	36.00	
2X18	34.00	38.00	
2X19	36.00	40.00	
2X20	38.00	42.00	

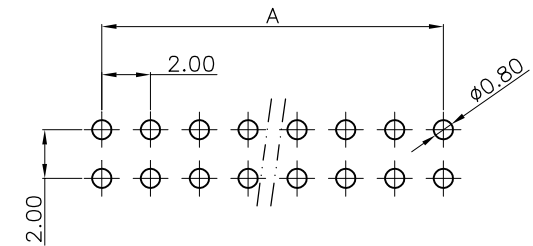

Specifications / 技术规格:

Current rating: 3A AC,DC(AWG#22)
 额定电流: 3A AC, DC (AWG#22)

Voltage rating: 250V AC,DC
 额定电压: 250V AC, DC

Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC 1Min
 耐电压: 800V AC 1分钟

Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Brass(Tin plated)
 接触端子材料: 黄铜(镀锡)

Insulation Material: PA or PBT UL94V-0
 绝缘塑胶材质: PA 或 PBT UL94V-0

浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ±3'	X.: ±0.35
.X: ±2'	X.X: ±0.25
.XX: ±1'	X.XX: ±0.15
.XXX: ±0.5'	X.XXX: ±0.10

DESIGN:	瞿益远	DATE:	2016-06-11
CHECKED:	张宁	DATE:	2016-06-11
APPROVED:	朱建华	DATE:	2016-06-11

DWG. NO.	
PART NO.	KL-PHC-2XNAW-02-BE

TITLE.	PHC-2XNAW
--------	-----------

REV.	A	UNIT.	mm	SCALE.	-	PROJ.	
------	---	-------	----	--------	---	-------	--

1 2 3 4 5 6 7 8 9