

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.9.14

### Specifications / 技术规格:

Current Rating: 3A

额定电流: 3A

Voltage rating: 250V AC,DC

额定电压: 250V AC,DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC

耐电压: 800V AC





Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C


### Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural


绝缘体塑胶材料: PA 或 PBT UL94V-2 本色

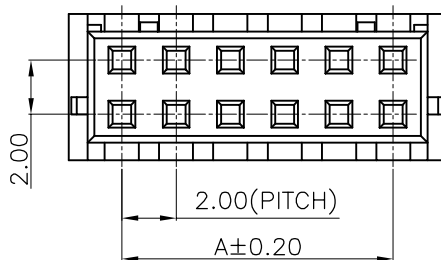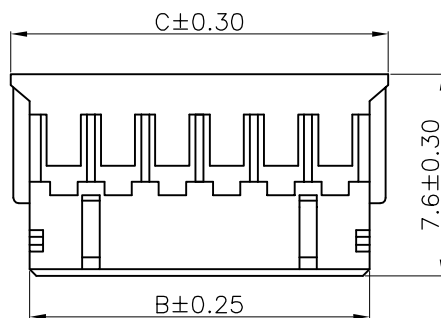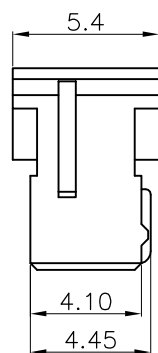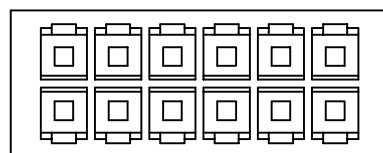

CKT.	尺寸 (mm)		
	A	B	C
2×2	2.00	4.60	6.00
2×3	4.00	6.60	8.00
2×4	6.00	8.60	10.00
2×5	8.00	10.60	12.00
2×6	10.00	12.60	14.00
2×7	12.00	14.60	16.00
2×8	14.00	16.60	18.00
2×9	16.00	18.60	20.00
2×10	18.00	20.60	22.00
2×11	20.00	22.60	24.00
2×12	22.00	24.60	26.00
2×13	24.00	26.60	28.00
2×14	26.00	28.60	30.00
2×15	28.00	30.60	32.00
2×16	30.00	32.60	34.00
2×17	32.00	34.60	36.00
2×18	34.00	36.60	38.00
2×19	36.00	38.60	40.00
2×20	38.00	40.60	42.00



PHD-2X3Y



PHD-2X2Y

 浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co., LTD.

#### GENERAL TOLERANCE

X.: ± 3'	X.: ± 0.35
.X: ± 2'	X.X: ± 0.25
.XX: ± 1'	X.XX: ± 0.15
.XXX: ± 0.5'	X.XXX: ± 0.10

DESIGN: 朱前程

DATE: 2015-09-14

CHECKED: 张宁

DATE: 2015-09-14

APPROVED: 朱建华

DATE: 2015-09-14

DWG. NO.

PART NO.

KL-PHD-2XNY

TITLE.

PHD-2XNY

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	