


RoHS

REV.	ECN NO.	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	20.05.08

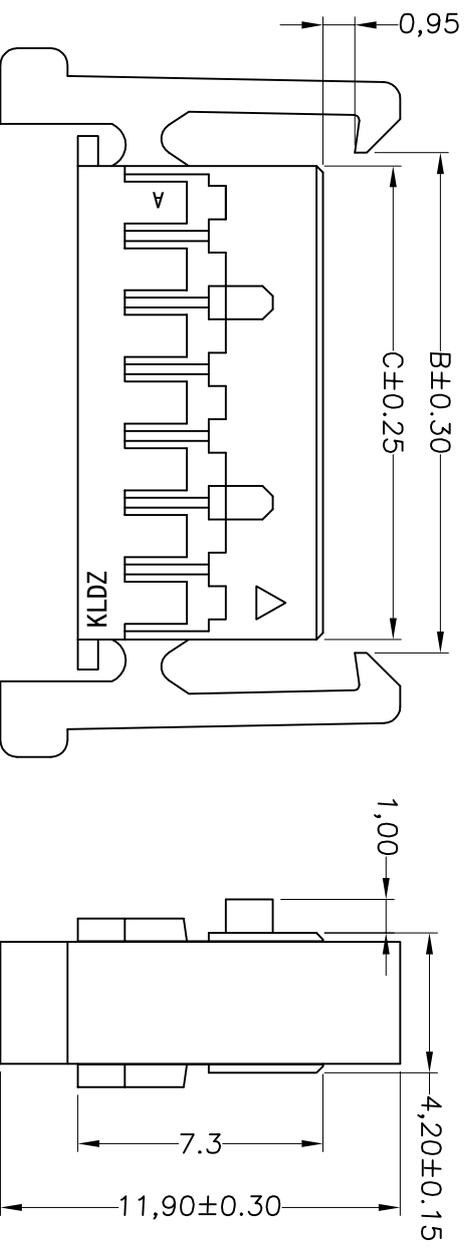

CKT.	DIM (mm)		
	A	B	C
2×2	2.00	5.00	4.50
2×3	4.00	7.00	6.50
2×4	6.00	9.00	8.50
2×5	8.00	11.00	10.50
2×6	10.00	13.00	12.50
2×7	12.00	15.00	14.50
2×8	14.00	17.00	16.50
2×9	16.00	19.00	18.50
2×10	18.00	21.00	20.50
2×11	20.00	23.00	22.50
2×12	22.00	25.00	24.50
2×13	24.00	27.00	26.50
2×14	26.00	29.00	28.50
2×15	28.00	31.00	30.50

Specifications / 技术规格:

Current Rating: 3A  
 额定电流: 3A

Voltage rating: 250V AC,DC  
 额定电压: 250V AC,DC


Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC  
 耐电压: 800V AC

Operating Temperature: -25°C to +85°C  
 工作温度: -25° C 到 85° C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Black  
 绝缘体塑胶材料: PA 或 PBT UL94V-2 黑色

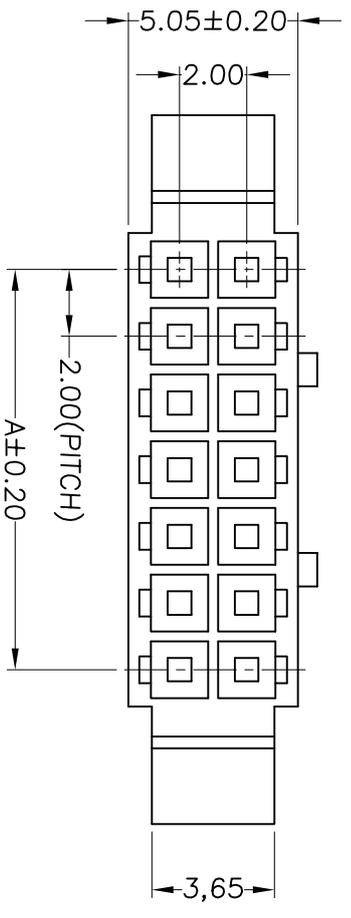

**浙江快利电子有限公司**  
 Zhejiang Kuaili Electronic Co., Ltd

REV. A UNIT. MM SCALE: ---

GENERAL TOLERANCE		DESIGN:		DATE:	
X' ± 3'	.XXX: ±0.10	HELLER	DATE:	20'.05.08	DWG. NO.
X' ± 2'	.XX: ±0.15	检查人: 瞿益远	CHECKED:	DATE:	20'.05.08
.XX' ± 1'	.X: ±0.25	审核人: 朱建慧	AUDITED:	DATE:	20'.05.08
.XXX' ± 0.5'	X: ±0.35	批准人: 朱建华	APPROVED:	DATE:	20'.05.08

PART NO. KL-PHDS-2XNYC

TITLE: PHDS-2XNYC