
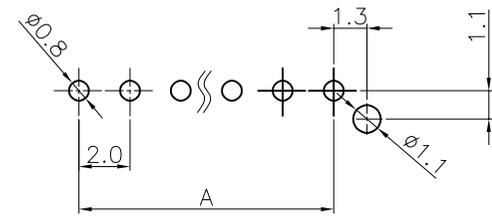


RoHS	REV.	ECN NO	DESCRIPTION	REVISED	DATE
	A		新订图面	KEVIN	



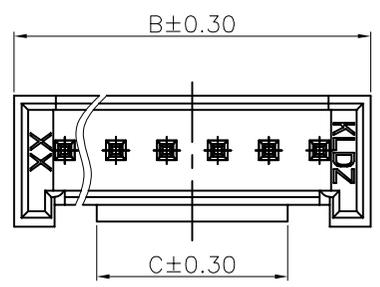


Recommended P.C.Board Hole Layout

Specifications / 技术规格:

Current rating: 2A  
 额定电流: 2A  
 Voltage rating: 100V AC,DC  
 额定电压: 100V AC, DC  
 Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ  
 Dielectric Withstanding: 800V AC 1Min  
 耐电压: 800V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到 85°C

Materials / 材料:  
 Contact Material: Brass(Sn plating)  
 接触端子材料: 黄铜(镀锡)  
 Insulation Material: PA or PBT UL94V-0 Natural  
 绝缘体塑胶材料: PA 或 PBT UL94V-0 本色

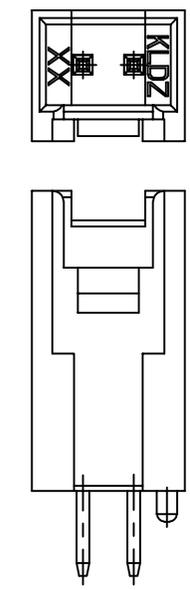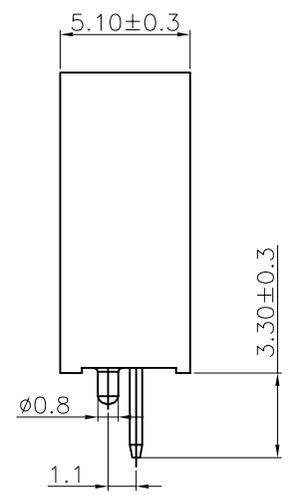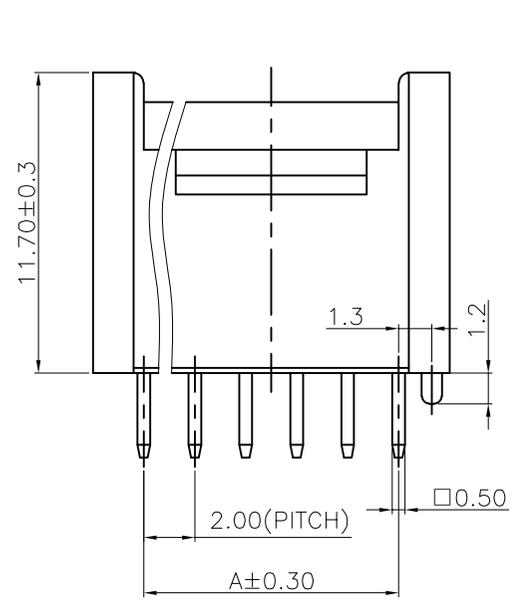

PHS-H-2AD

CKT.	DIM(mm)		
	A	B	C
2	2.00	6.00	2.4
3	4.00	8.00	2.9
4	6.00	10.00	3.5
5	8.00	12.00	5.5
6	10.00	14.00	7.5
7	12.00	16.00	9.5
8	14.00	18.00	11.5
9	16.00	20.00	13.5
10	18.00	22.00	15.5
11	20.00	24.00	17.5
12	22.00	26.00	19.5
13	24.00	28.00	21.5
14	26.00	30.00	23.5
15	28.00	32.00	25.5
16	30.00	34.00	27.5

 浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	---

GENERAL TOLERANCE	
X.* ± 3'	.XXX ± 0.10
.X* ± 2'	.XX ± 0.25
.XX* ± 1'	.X ± 0.35
.XXX* ± 0.5'	X. ± 0.50

DESIGN:	KEVIN	DATE:	2023.7.22
CHECKED:	张国旭	DATE:	2023.7.22
AUDITED:	朱继衡	DATE:	2023.7.22
APPROVED:	王子林	DATE:	2023.7.22

DWG. NO.	PART NO. KL-PHS-H-NAD-02-BE
TITLE.	

TITLE.  
**PHS-H-NAD**