
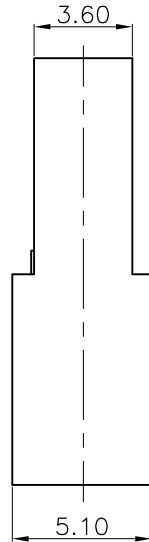
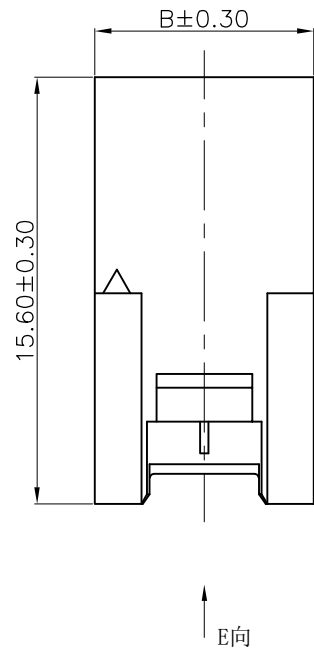
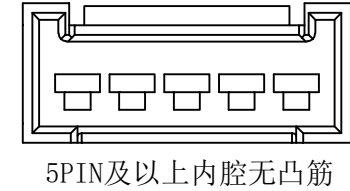




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2016.4.10

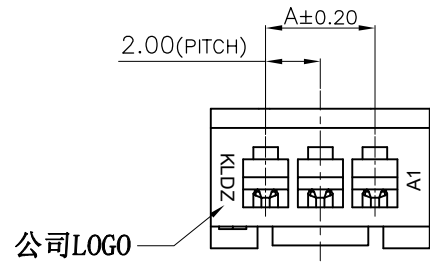

CKTS	DIM	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

Specifications / 技术规格:

Current Rating: 2A  
额定电流: 2A

Insulation Resistance: 1000MΩ Min.  
绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC  
耐电压: 800V AC

Operating Temperature: -25°C to +85°C  
工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2  
绝缘体塑胶材料: PA 或 PBT UL94V-2

 浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co., LTD.


GENERAL TOLERANCE	
X.: ± 3'	X.: --
.X: ± 2'	X.X: ±0.30
.XX: ± 1'	X.XX: ±0.20
.XXX: ± 0.5'	X.XXX: --

DESIGN:	瞿益远
CHECKED:	
APPROVED:	

DATE:	2016-04-10
DATE:	
DATE:	

DWG. NO.	
PART NO.	KL-PHS-NAS-01-W

TITLE.	PHS-NAS
--------	---------

REV.	A	UNIT.	mm	SCALE.	-	PROJ.	
------	---	-------	----	--------	---	-------	---