

ROHS






REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2014.8.26
A1		图面标准化	HELLER	2019.03.22

Specifications / 技术规格:

Current Rating: 2A
 额定电流: 2A
 Rated voltage: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC
 耐电压: 800V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2
 绝缘体塑胶材料: PA 或 PBT UL94V-2

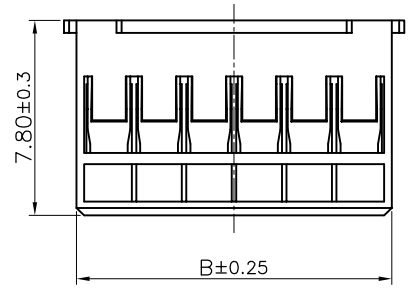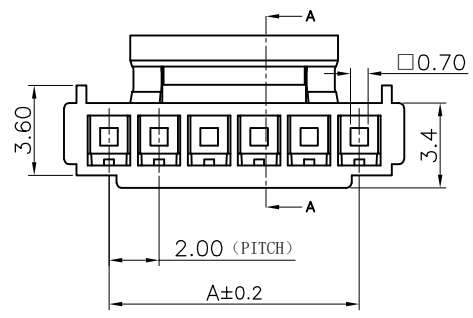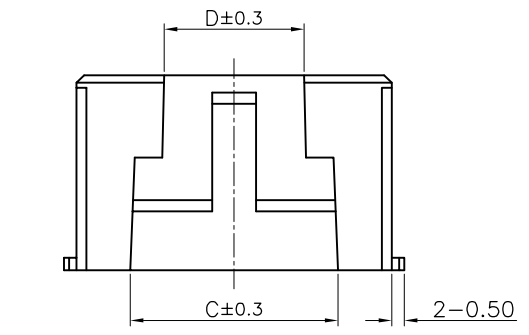

PIN数	尺寸 (mm)			
	A	B	C	D
2	2.0	4.7	2.3/3.2	1.0/2.8
3	4.0	6.7	3.2/4.0	2.8/3.8
4	6.0	8.7	4.3/5.0	1.6/4.85
5	8.0	10.7	7.2	4.6
6	10.0	12.7	8.3	5.6
7	12.0	14.7	10.3	7.6
8	14.0	16.7	12.3	9.6
9	16.0	18.7		
10	18.0	20.7	16.3	13.6
11	20.0	22.7		
12	22.0	24.7		
13	24.0	26.7		
14	26.0	28.7		
15	28.0	30.7		
16	30.0	32.7		

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd.

GENERAL TOLERANCE	
X° ± 3°	X. --
.X° ± 2°	.X ±0.30
.XX° ± 1°	.XX ±0.20
.XXX° ± 0.5°	.XXX --

DESIGN:	HELLER	DATE:	19'.03.22
CHECKED:	朱建慧	DATE:	19'.03.22
APPROVED:	朱建华	DATE:	19'.03.22

DWG. NO.	KL-PHS-NY-01-W
PART NO.	

TITLE:
PHS-NY

REV.	UNIT.	SCALE.	
A1	MM	---	