
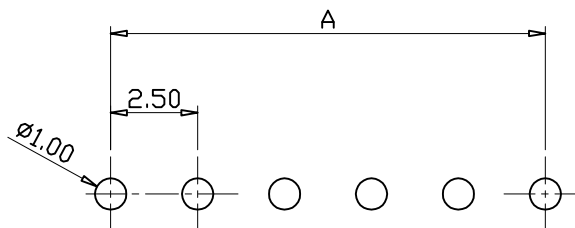


1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.3.10

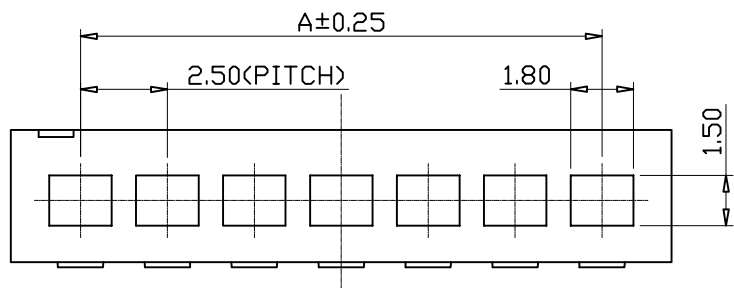



Recommended P.C. Board Hole Layout

Specifications / 技术规格:

Current rating: 3A
 额定电流: 3A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC,DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC 1Min
 耐电压: 800V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural
 绝缘体塑胶材料: PA 或 PBT UL94V-2 本色

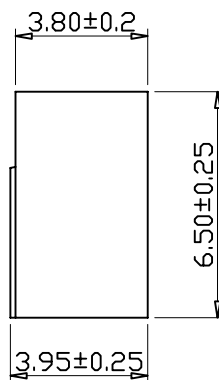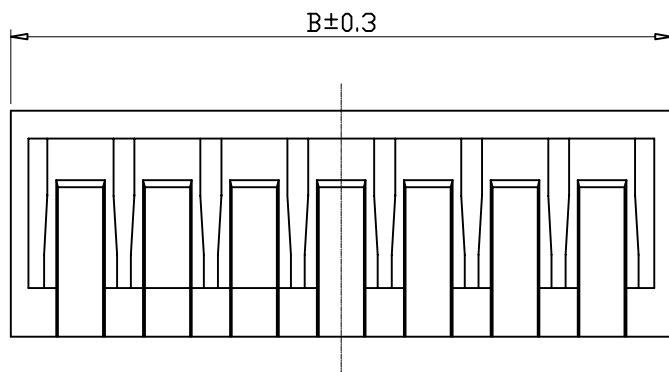

CKT.	尺寸 (mm)	
	A	B
2	2.5	6.5
3	5.0	9.0
4	7.5	11.5
5	10.0	14.0
6	12.5	16.5
7	15.0	19.0
8	17.5	21.5
9	20.0	24.0
10	22.5	26.5
11	25.0	29.0
12	27.5	31.5
13	30.0	34.0
14	32.5	36.5
15	35.0	39.0
16	37.5	41.5

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE

X.° ± 3°	.XXX: ±0.10
.X° ± 2°	.XX: ±0.15
.XX° ± 1°	.X: ±0.25
.XXX° ± 0.5°	X: ±0.35

DESIGN: KEVIN

DATE: 2015.3.10

DWG. NO.

TITLE.

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

PART NO.

KL-SCN-NY

SCN-NY

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9