


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	LXM	2022.7.20

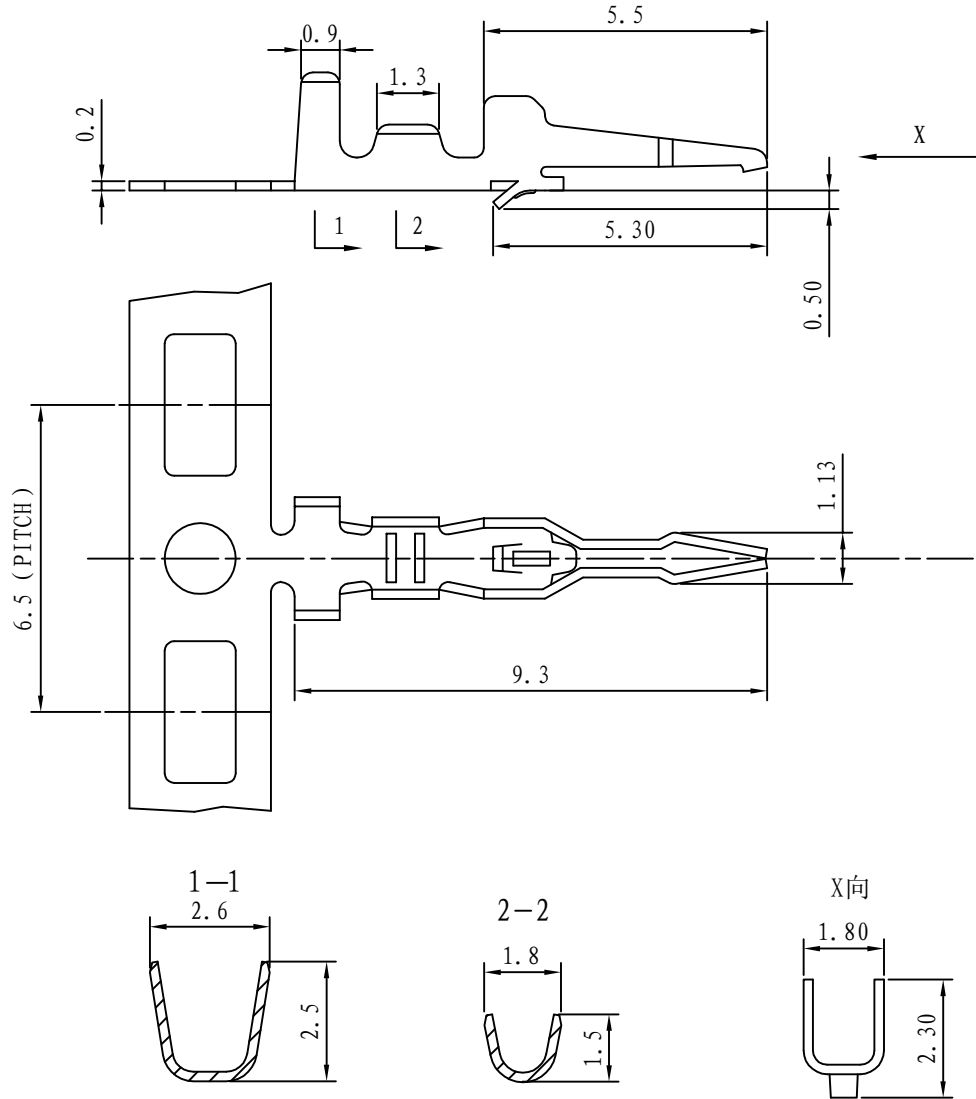

Specifications / 技术规格:

Current Rating: 3A

额定电流: 3A

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 800V AC

耐电压: 800V AC

Contact Resistance: 20mΩ Max.

接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Phosphor Bronze (Tin plating)

接触端子材料: 磷铜 (镀锡)

 浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X.: ± 3°	X.: ± 0.35
.X: ± 2°	X.X: ± 0.25
.XX: ± 1°	X.XX: ± 0.15
.XXX: ± 0.5°	X.XXX: ± 0.10

DESIGN: 李晓明

DATE: 2022-07-20

CHECKED: 朱建慧

DATE: 2022-07-20

APPROVED: 朱建华

DATE: 2022-07-20

DWG. NO.

PART NO.

KL-SCN-TE-D

TITLE.

SCN-TE-D

REV.	UNIT.	SCALE.	PAGE.	PROJ.
A	mm	-	1/1	