
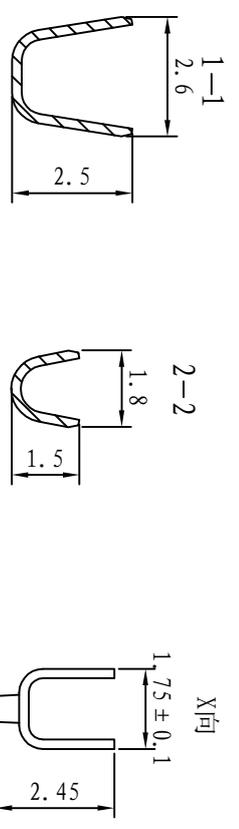
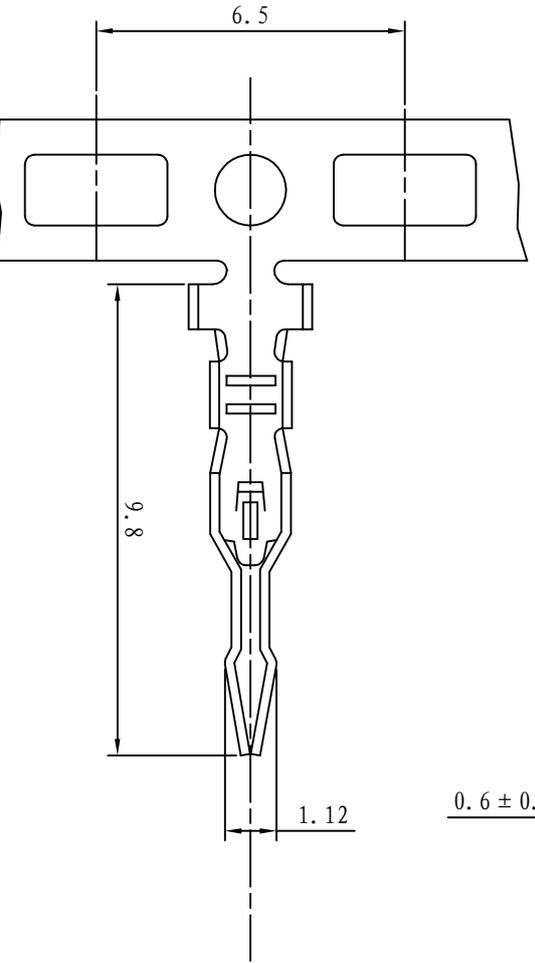


REV.	ECN NO.	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2016.4.18

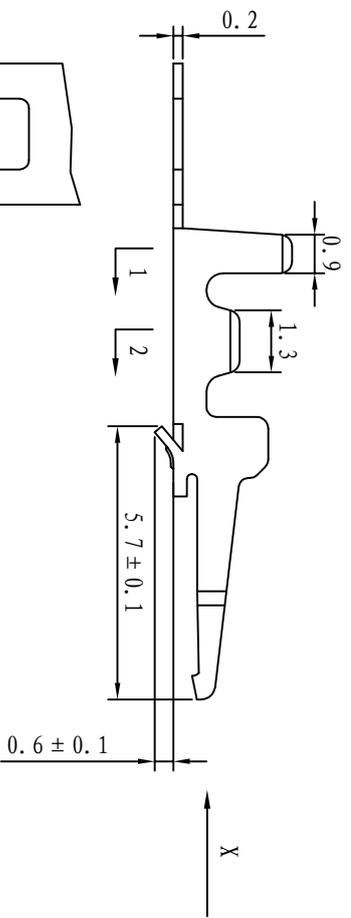

Specifications / 技术规格:

Current Rating: 3A
 额定电流: 3A
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC
 耐压: 800V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C
 Materials / 材料:
 Contact Material: Phosphor Bronze(Tin plating)
 接触端子材料: 磷铜(镀锡)

 浙江快利电子有限公司 Zhejiang Kuaile Electronic Co., LTD	REV. A	UNIT. mm	SCALE. -	PAGE. 1/1	PROJ.	GENERAL TOLERANCE X.: ± 3° X.: ± 0.35 X.: ± 2° X.X.: ± 0.25 .XX: ± 1° X.XX.: ± 0.15 .XXX: ± 0.5° X.XXX.: ± 0.10		DESIGN: KEVIN CHECKED: 李晓明 APPROVED: 朱建华	DATE: 2016-04-18 DATE: 2016-04-18 DATE: 2016-04-18	DWG. NO. PART NO. KL-SCN-TE-003	TITLE. SCN-TE(22)
---	--------	----------	----------	-----------	-------	---	--	---	---	---	-----------------------------