

ROHS



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

Specifications / 技术规格:

Current rating: 1A  
额定电流: 1A  
Voltage rating: 50V AC,DC  
额定电压: 50V AC,DC  
Insulation Resistance: 500MΩ Min.  
绝缘电阻: 最小500MΩ  
Dielectric Withstanding: 500V AC 1Min  
耐电压: 500V AC 1分钟  
Contact Resistance: 20mΩ Max.  
接触电阻: 最大20mΩ  
Operating Temperature: -25°C to +85°C  
工作温度: -25° C 到85° C

Materials / 材料:

Contact Material: Brass(Tin plating)  
接触端子材料: 黄铜(镀锡)  
Insulation Material: LCP or PA UL94 V-0  
绝缘体塑胶材质: LCP 或 PA UL94V-0

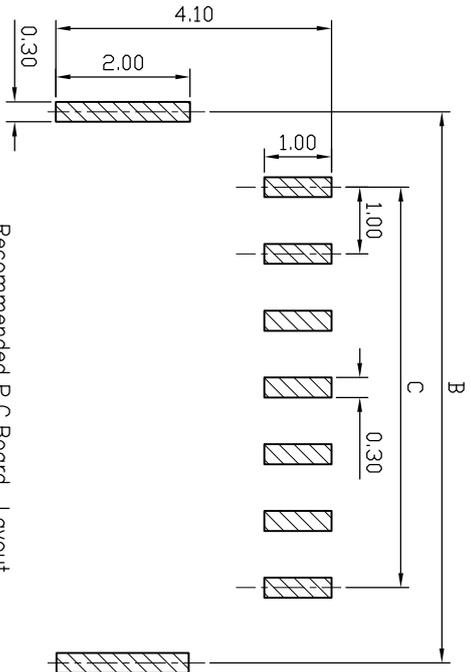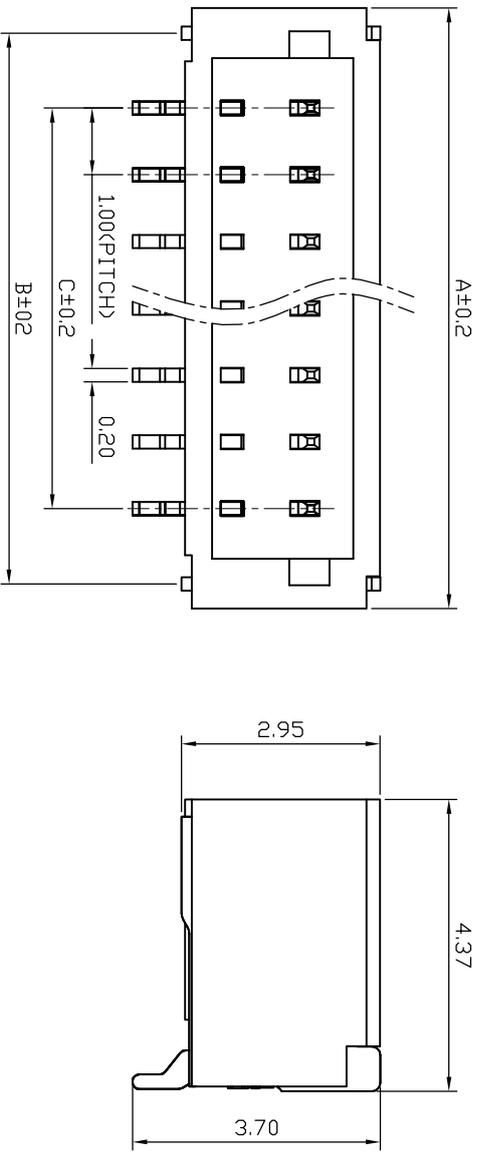

Recommended P.C.Board Layout

P 数	DIM=A	DIM=B	DIM=C
2	4.00	3.24	1.00
3	5.00	4.24	2.00
4	6.00	5.24	3.00
5	7.00	6.24	4.00
6	8.00	7.24	5.00
7	9.00	8.24	6.00
8	10.00	9.24	7.00
9	11.00	10.24	8.00
10	12.00	11.24	9.00
11	13.00	12.24	10.00
12	14.00	13.24	11.00
13	15.00	14.24	12.00
14	16.00	15.24	13.00
15	17.00	16.24	14.00
16	18.00	17.24	15.00



浙江快利电子有限公司  
Zhejiang Kuaili Electronic Co., Ltd

REV.	UNIT	SCALE	SYMBOL
A	MM	1:1	

GENERAL TOLERANCE		DESIGN:	KEVIN	DATE: 15.9.16
$X^{\circ} \pm 3^{\circ}$	.XXX	±0.10	朱前程	DATE: 15.9.16
$X^{\circ} \pm 2^{\circ}$	.XX	±0.15	张宁	DATE: 15.9.16
$.XX^{\circ} \pm 1^{\circ}$	.X	±0.25	朱建华	DATE: 15.9.16
$.XXX^{\circ} \pm 0.5^{\circ}$	X	±0.35		

DWG. NO.	PART NO.
	KL-SH1.0-NALT

SH1.0-NAL T连接器