

1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

F




E

D

C

B

A

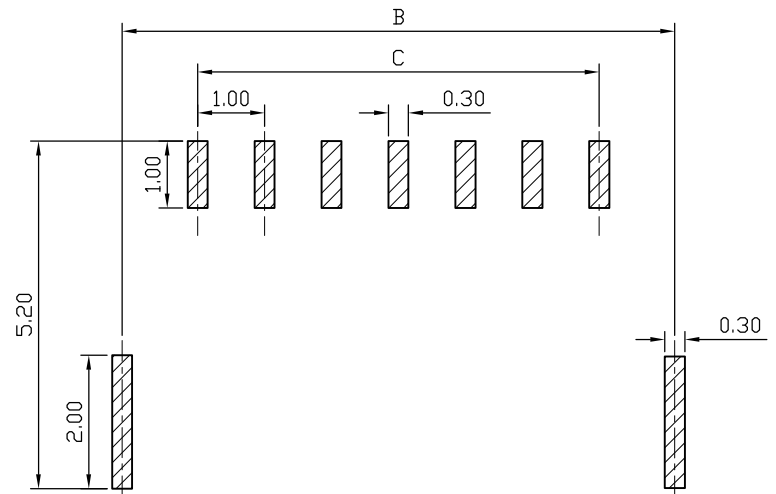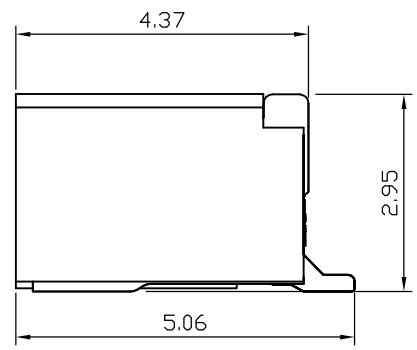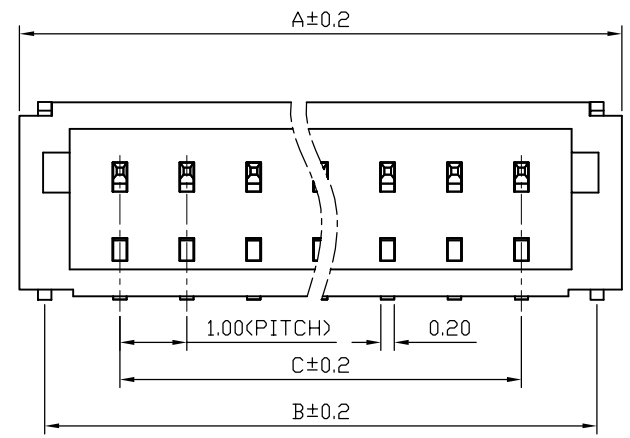

Recommended P.C.Board Layout

Specifications / 技术规格:

Current rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: bronze(Tin plating)
 接触端子材料: 磷铜(镀锡)
 Insulation Material: LCP or PA UL94 V-0
 绝缘体塑胶材质: LCP 或 PA UL94V-0

P 数	DIM=A	DIM=B	DIM=C
2	4.00	3.24	1.00
3	5.00	4.24	2.00
4	6.00	5.24	3.00
5	7.00	6.24	4.00
6	8.00	7.24	5.00
7	9.00	8.24	6.00
8	10.00	9.24	7.00
9	11.00	10.24	8.00
10	12.00	11.24	9.00
11	13.00	12.24	10.00
12	14.00	13.24	11.00
13	15.00	14.24	12.00
14	16.00	15.24	13.00
15	17.00	16.24	14.00
16	18.00	17.24	15.00

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X° ± 3°	.XXX: ±0.10
X° ± 2°	.XX: ±0.15
.XX° ± 1°	.X: ±0.25
.XXX° ± 0.5°	X.: ±0.35

DESIGN: KEVIN	DATE: 2013.6.24
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO. KL-SH1.0-NAWT
TITLE.	
SH1.0-NAWT连接器	

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9