

1 2 3 4 5 6 7 8 9

ROHS



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

Specifications / 技术规格:



Current Rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC, DC
 额定电压: 50V AC, DC
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-0
 绝缘体塑胶材料: PA 或 PBT UL94V-0

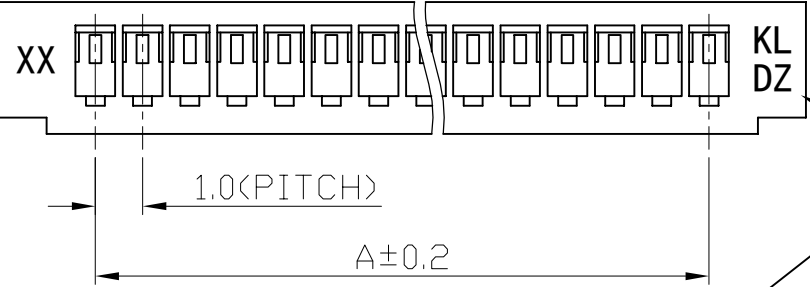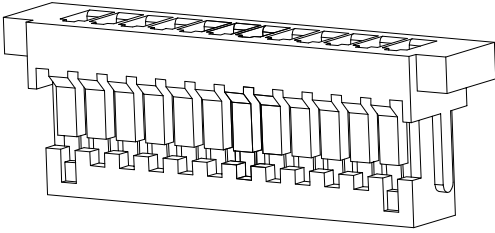

此两处其中一处刻公司LOGO, 具体以实物为准。

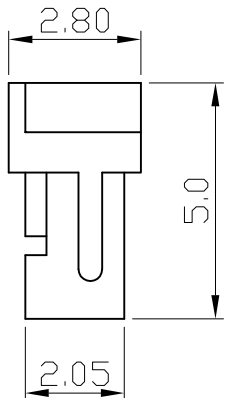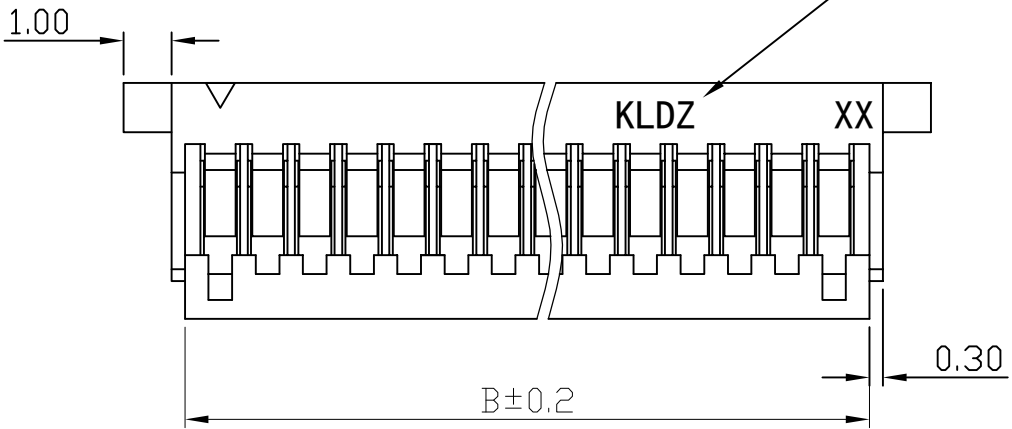

Poles	A	B
2	1.00	2.40
3	2.00	3.40
4	3.00	4.40
5	4.00	5.40
6	5.00	6.40
7	6.00	7.40
8	7.00	8.40
9	8.00	9.40
10	9.00	10.40
11	10.00	11.40
12	11.00	12.40
13	12.00	13.40
14	13.00	14.40
15	14.00	15.40
16	15.00	16.40

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.° ± 3°	X. XXX: ±0.10
.X° ± 2°	X. XX: ±0.15
.XX° ± 1°	X. X: ±0.25
.XXX° ± 0.5°	X.: ±0.35

DESIGN: KEVIN
 CHECKED:
 AUDITED:
 APPROVED:

DATE: 2015-3-10
 DATE:
 DATE:
 DATE:

DWG. NO.
 PART NO.
 KL-SH1.0-NY

TITLE:
 SH1.0-NY

REV. A UNIT. MM SCALE. 1:1

1 2 3 4 5 6 7 8 9