

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F


E

D




C

B

A

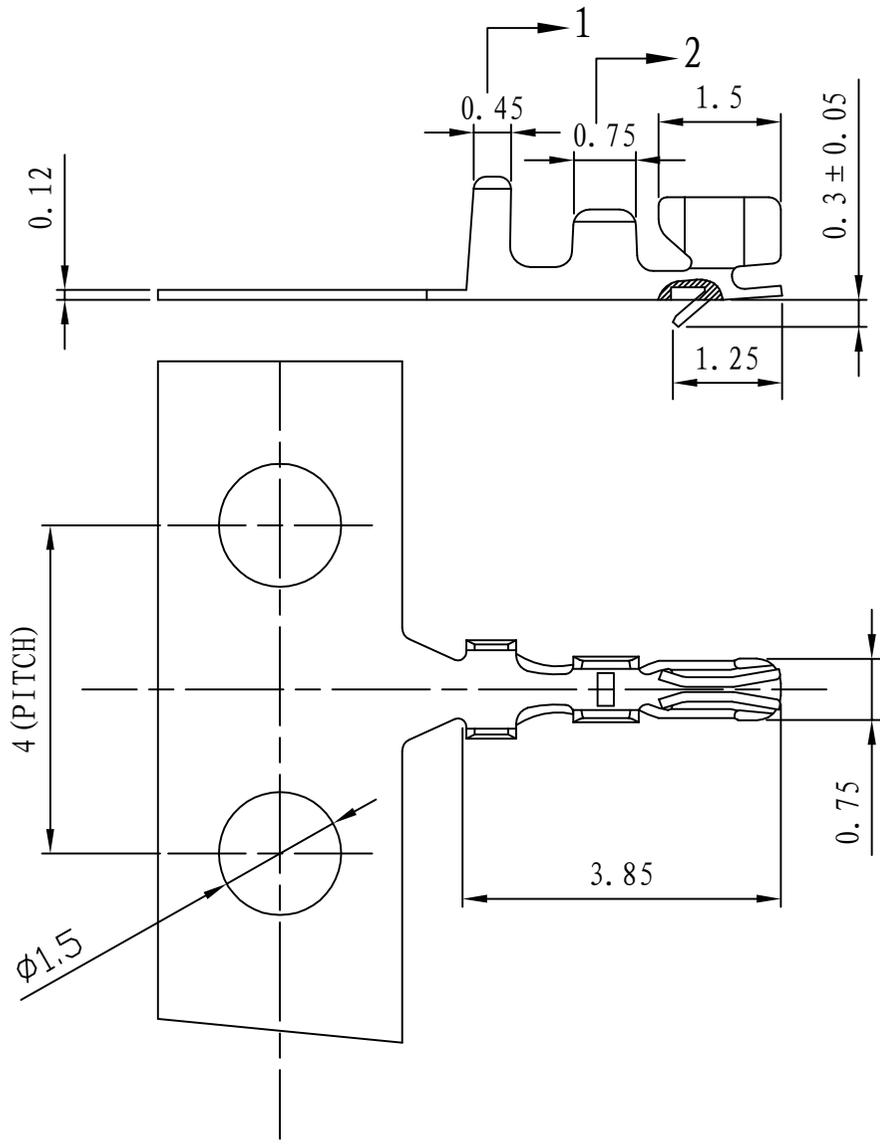

X ←



Specifications / 技术规格:

Current Rating: 1A
 额定电流: 1A
 Insulation Resistance: 500 MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC
 耐电压: 500V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Contact Material: Phosphor Bronze
 接触端子材料: 磷铜(镀锡) (Tin plated)

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. ± X.	.XXX: ±0.10
.X ± X.	.XX: ±0.15
.XX ± XX.	.X: ±0.25
.XXX ± 0.5.	X: ±0.35

DESIGN: 李晓明
 CHECKED: 李晓明
 AUDITED: 张宁
 APPROVED: 朱建华

DATE: 15'.11.02
 DATE: 15'.11.02
 DATE: 15'.11.02
 DATE: 15'.11.02

DWG. NO. -----
 PART NO. KL-SH1.0-TE

TITLE. SH1.0-TE

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	--

1 2 3 4 5 6 7 8 9