

1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	

Specifications / 技术规格:

Current Rating: 1A
 额定电流: 1A

Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC

Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC
 耐电压: 500V AC

Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ


Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C

Materials / 材料:

Insulation Material: PA or PBT UL94V-0
 绝缘体塑胶材料: PA 或 PBT UL94V-0

孔位 poles	尺寸DIM (mm)			
	A	B	C	D
2	1.0	2.4	2.6	1.0
3	2.0	3.4	3.6	2.0
4	3.0	4.4	4.6	3.0
5	4.0	5.4		
6	5.0	6.4	5.6	4.0
7	6.0	7.4		
8	7.0	8.4		
9	8.0	9.4		
10	9.0	10.4		
11	10.0	11.4		
12	11.0	12.4		
13	12.0	13.4		
14	13.0	14.4		
15	14.0	15.4		
16	15.0	16.4		

此两处其中一处刻公司LOGO, 具体以实物为准。

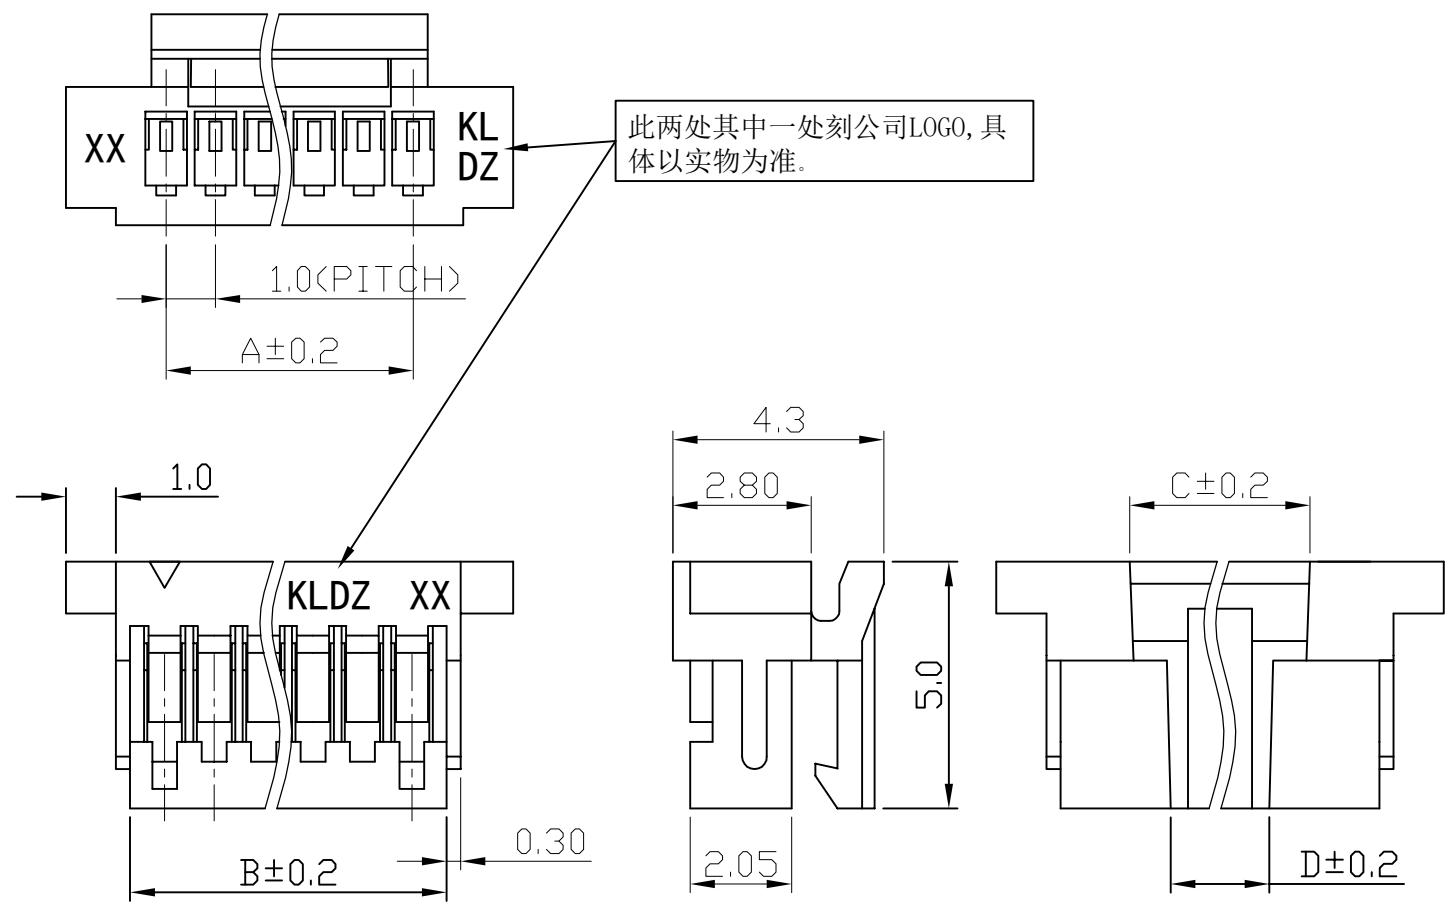

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3°	X. XXX: ±0.10
.X* ± 2°	X. XX: ±0.15
.XX* ± 1°	X. X ±0.25
.XXX* ± 0.5°	X. : ±0.35

DESIGN: KEVIN
 DATE: 2015-3-10

CHECKED:
 DATE:

AUDITED:
 DATE:

APPROVED:
 DATE:

DWG. NO.
 PART NO.
KL-SHB-NY

TITLE:
SHB-NY

1 2 3 4 5 6 7 8 9