



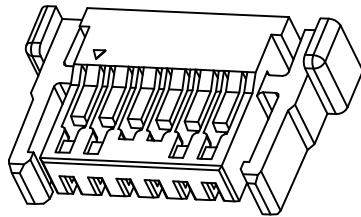
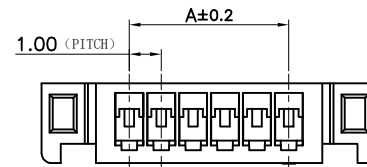
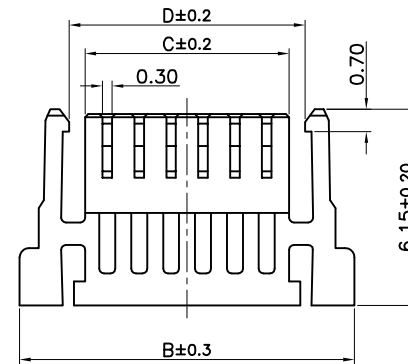


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		New drawing	HELLER	2016-3-7



A-A



CKT.	A	B	C	D
2	1.00	6.50	2.40	3.40
3	2.00	7.50	3.40	4.40
4	3.00	8.50	4.40	5.40
5	4.00	9.50	5.40	6.40
6	5.00	10.50	6.40	7.40
7	6.00	11.50	7.40	8.40
8	7.00	12.50	8.40	9.40
9	8.00	13.50	9.40	10.40
10	9.00	14.50	10.40	11.40
11	10.00	15.50	11.40	12.40
12	11.00	16.50	12.40	13.40
13	12.00	17.50	13.40	14.40
14	13.00	18.50	14.40	15.40
15	14.00	19.50	15.40	16.40
16	15.00	20.50	16.40	17.40

SPECIFICATIONS:

- 1.Operation temperature : -25~+85°C;
- 2.Crrent rating: 1.0A;
- 3.Voltag rating: 125V DC/AC;
- 4.Contact resistance: 20mΩ max;
- 5.Insulation resistance: 100MΩ min;
- 6.Dielectric voltage: 500V AC /1minute;
- 7.Environmental requirement:according to ROHS standard.

MATERIAL:

Insulation Material: PA or PBT UL94V-0

 浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co.,LTD.

GENERAL TOLERANCE

X.:±3°	X.: ±0.35
.X:±2°	X.X: ±0.25
.XX:±1°	X.XX: ±0.15
.XXX:±0.5°	X.XXX:±0.10

DESIGN:

DATE:

DWG. NO.

TITLE.

CHECKED:

DATE:

PART NO.

SHJ-NY

APPROVED:

DATE:

KL-SHJ-NY

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	