


ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2021.9.10

Specifications / 技术规格:

Current Rating: 3A
 额定电流: 3A
 Voltage rating: 250V AC,DC
 额定电压: 250V AC, DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Dielectric Withstanding: 800V AC
 耐电压: 800V AC
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 85°C
 Materials / 材料:
 Insulation Material: PA or PBT UL94V-2
 绝缘体塑胶材料: PA 或 PBT UL94V-2

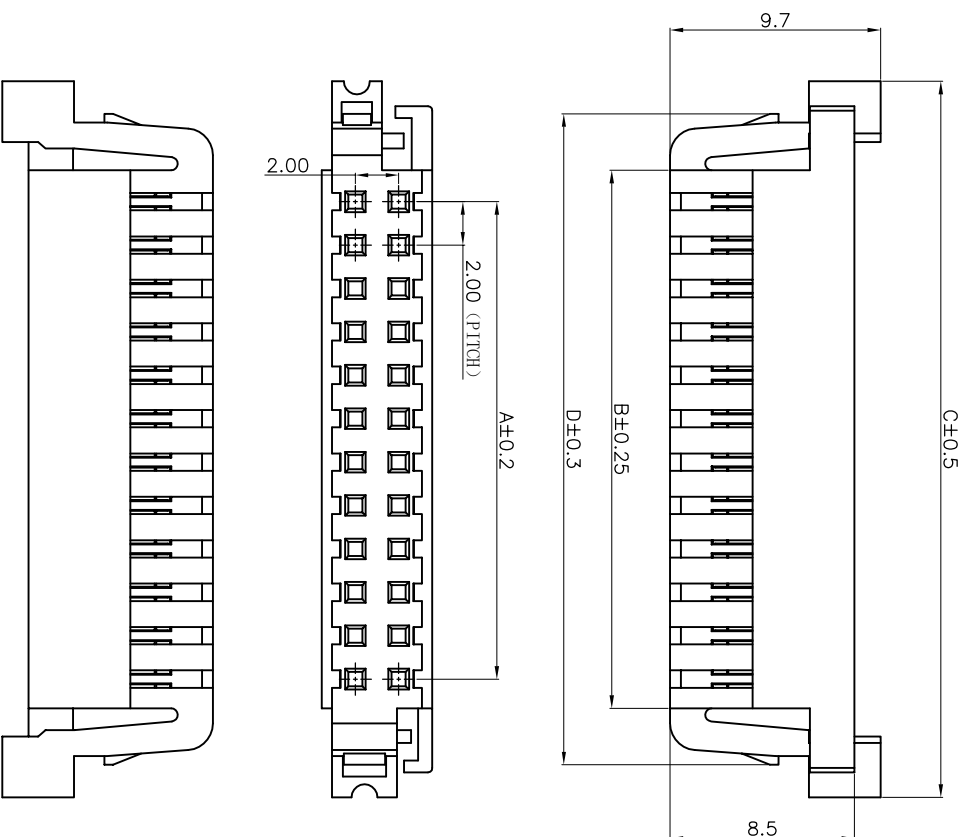

孔数	A	B	C	D
2×2	2.00	4.80	13.00	9.50
2×3	4.00	6.80	15.00	11.50
2×4	6.00	8.80	17.00	13.50
2×5	8.00	10.80	19.00	15.50
2×6	10.00	12.80	21.00	17.50
2×7	12.00	14.80	23.00	19.50
2×8	14.00	16.80	25.00	21.50
2×9	16.00	18.80	27.00	23.50
2×10	18.00	20.80	29.00	25.50
2×11	20.00	22.80	31.00	27.50
2×12	22.00	24.80	33.00	29.50
2×13	24.00	26.80	35.00	31.50
2×14	26.00	28.80	37.00	33.50
2×15	28.00	30.80	39.00	35.50
2×16	30.00	32.80	41.00	37.50
2×17	32.00	34.80	43.00	39.50
2×18	34.00	36.80	45.00	41.50
2×19	36.00	38.80	47.00	43.50
2×20	38.00	40.80	49.00	45.50

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., LTD

REV. A UNIT. mm SCALE. - PROJ.

GENERAL TOLERANCE

X.: ± 3°	X.: ± 0.35
X.: ± 2°	X.X.: ± 0.25
.XX.: ± 1°	X.XX.: ± 0.15
.XXX.: ± 0.5°	X.XXX.: ± 0.10

DESIGN: HELLER

CHECKED:
 APPROVED:

DATE: 2021-09-10

DATE:
 DATE:

DWG. NO.

PART NO.

TITLE:

KL-SMH-2XNY-B
 SMH-2XNY-B
 2.0间距双排两侧带扣