
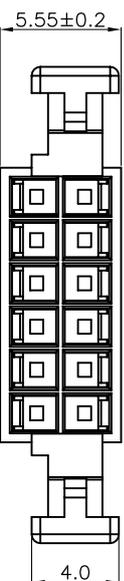

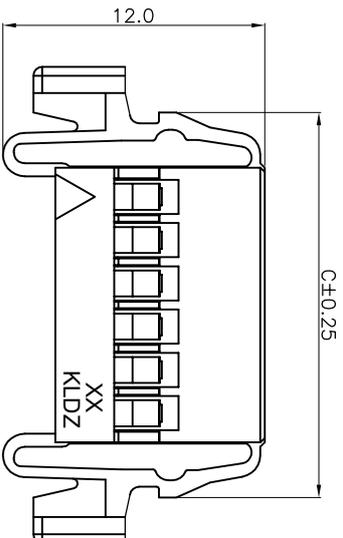


REV.	ECN NO	DESCRIPTION	REVISED	DATE
		新订图面	HELLER	2018.11.17

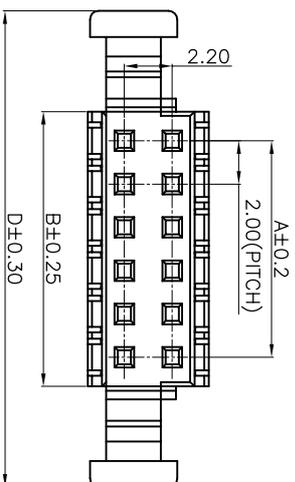

孔数	A	B	C	D
2X2	2.0	4.7	9.8	14.0
2X3	4.0	6.7	11.8	16.0
2X4	6.0	8.7	13.8	18.0
2X5	8.0	10.7	15.8	20.0
2X6	10.0	12.7	17.8	22.0
2X7	12.0	14.7	19.8	24.0
2X8	14.0	16.7	21.8	26.0
2X9	16.0	18.7	23.8	28.0
2X10	18.0	20.7	25.8	30.0
2X11	20.0	22.7	27.8	32.0
2X12	22.0	24.7	29.8	34.0
2X13	24.0	26.7	31.8	36.0
2X14	26.0	28.7	33.8	38.0
2X15	28.0	30.7	35.8	40.0
2X16	30.0	32.7	37.8	42.0
2X17	32.0	34.7	39.8	44.0
2X18	34.0	36.7	41.8	46.0
2X19	36.0	38.7	43.8	48.0
2X20	38.0	40.7	45.8	50.0

Specifications / 技术规格:

- Current Rating: 3A
- 额定电流: 3A
- Voltage rating: 250V AC,DC
- 额定电压: 250V AC,DC
- Insulation Resistance: 1000MΩ Min.
- 绝缘电阻: 最小1000MΩ
- Dielectric Withstanding: 800V AC
- 耐电压: 800V AC
- Operating Temperature: -25°C to +85°C
- 工作温度: -25° C 到 85° C
- Materials /材料:
- Insulation Material: PA or PBT UL94V-2
- 绝缘体塑胶材料: PA 或 PBT UL94V-2



浙江快利电子有限公司
Zhejiang Kuaile Electronic Co., LTD

REV. A	UNIT. mm	SCALE. -	PROJ.
--------	----------	----------	-------

GENERAL TOLERANCE	
X.: ± 3°	X.: ±0.35
.X.: ± 2°	X.X.: ±0.25
.XX.: ± 1°	X.XX.: ±0.15
.XXX.: ± 0.5°	X.XXX.: ±0.10

DESIGN: HELLER	CHECKED:	APPROVED:
----------------	----------	-----------

DATE: 2018-11-17	DATE:
------------------	-------

DWG. NO.	PART NO.
	KL-SMH-2XNY

TITLE:
2.0间距双排两侧带扣
SMH-2XNY